


Category 6 LSOH cables for LCS²

Catalogue number(s): **327 54/56/57/76**
328 56/59/61/63/71

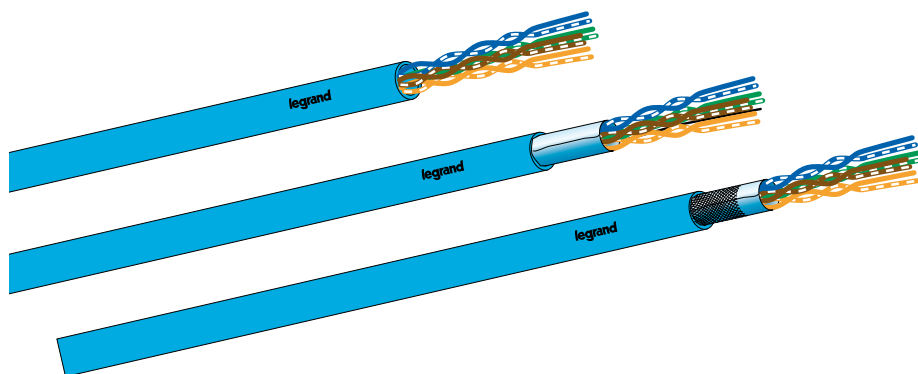

CONTENTS

Pages

1. Use and assembly	1
2. Description	1
3. Cable markings	1
4. Performance at 250 MHz	1
5. Technical and mechanical features	2
6. Electrical features at 20°	2
7. Ordering information	3
8. Environmental features	3
9. Standards and approvals	3

1. USE AND ASSEMBLY

Cable for high-speed VDI transmission networks.


2. DESCRIPTION

U/UTP 100 Ω

Insulation: solid PE
 $\varnothing$ 0.96 mm

Copper:
 $\varnothing$ > 0.56 mm

Protection:
LSOH sleeve

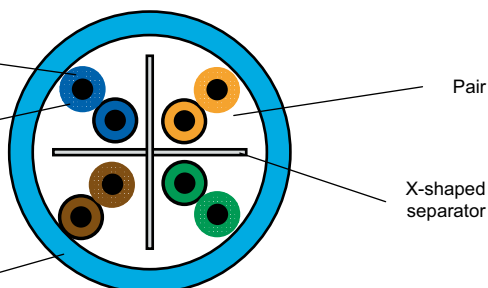


F/UTP 100 Ω

Copper:
 $\varnothing$ > 0.56 mm

Insulation: solid PE
 $\varnothing$ 1.10 mm

Pair

X-shaped
separator

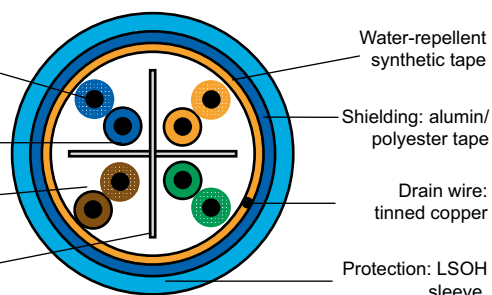


S/FTP 100 Ω

Water-repellent
synthetic tape

X-shaped
separator

Shielding: alumin/
polyester tape
+ tinned braid

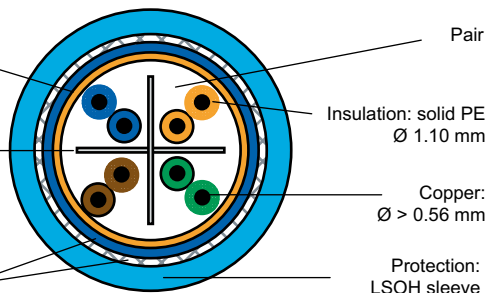

Note:

The conductive part of the shielding is located on the wire side

3. MARKING OF LEGRAND CABLES

Legrand
Catalogue number
Number of pairs
Gauge
Type
Impedance
Type of sleeve
Category
Conformity to standards
VPN/NVP
Batch number
Measurement (remaining length)

4. PERFORMANCE AT 250 MHZ (standard EIA/TIA 568-C.2)

Maximum attenuation (dB/100 m):	32.8
Minimum NEXT (dB):	38.3
PS NEXT (dB):	36.3
ACRF (dB/100 m):	18.8
PS ACRF (dB/100 m):	16.8
Return Loss (dB):	17.3

5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	327 54	327 56	327 57	327 76	328 56	328 59	328 61	328 63	328 71
Type	U/UTP	F/UTP	SF/UTP	F/UTP	F/UTP	SF/UTP	U/UTP	U/UTP	U/UTP
Type of sleeve	LSOH	LSOH	LSOH	LSOH	LSOH	LSOH	LSOH	LSOH	LSOH
Number of pairs	4	4	4	2 x 4	4	2 x 4	4	2 x 4	4
Assembly	Pairs	Pairs	Pairs	Pairs	Pairs	Pairs	Pairs	Pairs	Pairs
Diameter over insulation (mm)	1.02 ± 0.06	1.16 ± 0.05	1.16 ± 0.05	1.16 ± 0.05	1.16 ± 0.05	1.16 ± 0.05	1.02 ± 0.06	1.02 ± -0.05	1.02 ± 0.06
Cable diameter (mm)	6.1 ± 0.3	7.1 ± 0.5	8.1 ± 0.3	7.3 ± 0.5 x 15.1 ± 1.5	7.1 ± 0.5	8.1 ± 0.3 x 16.3 ± 0.7	6.1 ± 0.3	6.4 ± 0.1 x 13.7 ± 0.7	6.1 ± 0.3
Weight of cable (kg/km)	35 to 41	42 to 55	57 to 66	53 to 82	42 to 55	117 to 135	35 to 41	80 to 107	35 to 41
Min. bending radius when laying (mm)	25	60	65	60	60	65	25	25	25
AWG gauge	23	23	24	24	23	23	23	23	23

6. ELECTRICAL FEATURES AT 20°C

Catalogue number	327 54	327 56	327 57	327 76	328 56	328 59	328 61	328 63	328 71
Type	U/UTP	F/UTP	SF/UTP	F/UTP	F/UTP	SF/UTP	U/UTP	U/UTP	U/UTP
Maximum linear resistance (ohm/km)	95 *	95 *	95 *	95 *	95 *	95 *	95 *	95 *	95 *
DC dielectric strength	1 KV/ 1 min *	1 KV/ 1 min *	1 KV/ 1 min *	1 KV/ 1 min *	1 KV/ 1 min *	1 KV/ 1 min *	1 KV/ 1 min *	1 KV/ 1 min *	1 KV/ 1 min *
Minimum insulation resistance (Mohm.km)	5000	5000	5000	5000	5000	5000	5000	5000	5000
Minimum propagation speed	> 65%	> 65%	> 65%	> 65%	> 65%	> 65%	> 65%	> 65%	> 65%
Characteristic impedance from 1 to 100 MHz	100 Ω ±15%	100 Ω ±15%	100 Ω ±15%	100 Ω ±15%	100 Ω ±15%	100 Ω ±15%	100 Ω ±15%	100 Ω ±15%	100 Ω ±15%

* According to standard IEC 61156-5

7. ORDERING INFORMATION

Catalogue number	327 54	327 56	327 57	327 76	328 56	328 59	328 61	328 63	328 71
Type	U/UTP	F/UTP	SF/UTP	F/UTP	F/UTP	SF/UTP	U/UTP	U/UTP	U/UTP
Colour	Blue RAL 5015	Blue RAL 5015	Blue RAL 5015	Blue RAL 5015	Blue RAL 5015	Blue RAL 5015	Blue RAL 5015	Blue RAL 5015	Blue RAL 5015
Pack (m)	305	500	500	500	305	500	500	500	1000
Packaging	Box	Reel	Reel	Reel	Reel in box	Reel	Reel	Reel	Reel

8. ENVIRONMENTAL FEATURES

Storage and transport temperature: 0 to + 50°C

Usage temperature: – 20 to + 60°C

Fire resistance: IEC 60332-1, UL VW-1

9. STANDARDS AND APPROVALS

Cat. 6, 250 MHz

EIA/TIA 568-C.2

EN 50173

EN 52288

IEC 11801

IEC 61156-5