
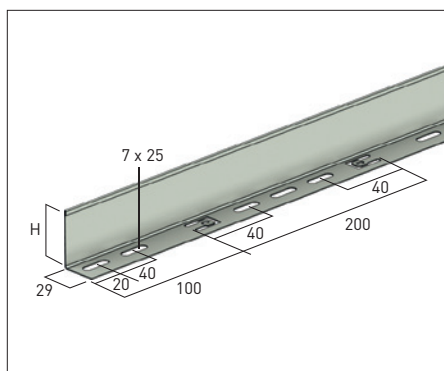


COT



Cornières de séparation

CABLOFIL

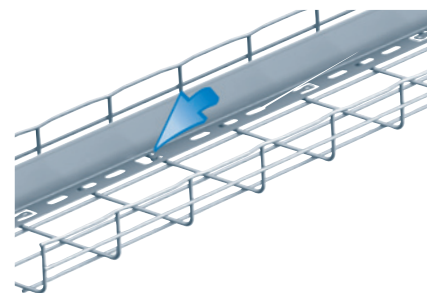

	H (mm)	Emb.	GS	GC	304L	316L
COT 30	24	3 m	CM923010	CM923013	-	-
COT 50	48	3 m	CM923020	CM923023	CM923028	CM923024
COT 75	72	3 m	CM923030	CM923033	-	-
COT 100	96	3 m	CM923040	CM923043	CM923048	CM923044



Jonctions COT J

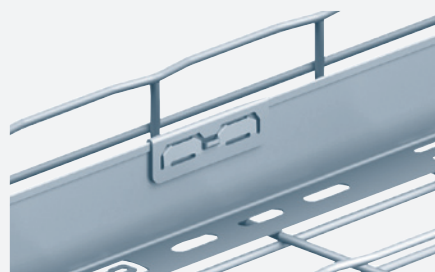

Montage par encliquetage sur cornières COT (ci-dessus).

	Emb.	GS	316L
COT J	25	CM923050	CM923054

Embout de protection EP



	Emb.	PVC
EPDCOT50	10	CM559635
EPGCOT50	10	CM559645
EPLCOT50	10	CM559655

Choix des chemins de câbles

LES MATÉRIAUX

EZ Electrozingage après fabrication Norme EN ISO 2081	DC Géomet
GS Galvanisation procédé Sendzimir Norme EN 10346	304L Inox 304 L Norme EN 10088-2
PG Galvanisation en continu Norme EN 10244-2	316L Inox 316 L Norme EN 10088-2
GC Galvanisé à chaud après fabrication Norme EN ISO 1461	