
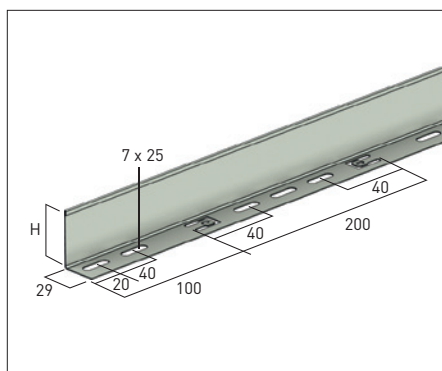




COT Scheidingsschotten

CABLOFIL

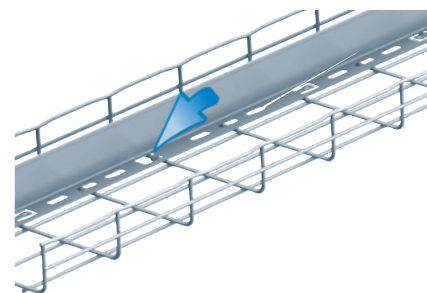

	H (mm)	Verp.	GS	GC	304L	316L
COT 30	24	3 m	CM923010	CM923013	-	-
COT 50	48	3 m	CM923020	CM923023	CM923028	CM923024
COT 75	72	3 m	CM923030	CM923033	-	-
COT 100	96	3 m	CM923040	CM923043	CM923048	CM923044



Verbinding COT J

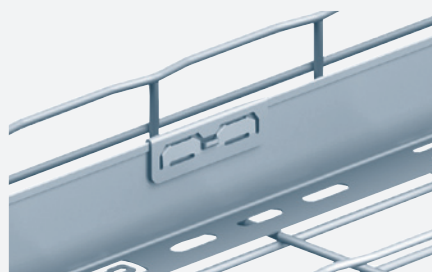

Montage door inklikken in de uitsparing (zie hierboven)

	Verp.	GS	316L
COT J	25	CM923050	CM923054

Eindstukken EP



	Verp.	PVC
EPDCOT50	10	CM559635
EPGCOT50	10	CM559645
EPLCOT50	10	CM559655

Draadgoten: keuzetabel

MATERIAALSOORTEN

EZ Elektrolytisch verzinkt
Norm EN ISO 2081

GS Sendzimir verzinkt
Norm EN 10346

PG Vóór fabricage verzinkt
Norm EN 10244-2

GC Thermisch verzinkt
Norm EN ISO 1461

DC Geomet bescherming

304L RVS 304 L (Inox)
Norm EN 10088-2

316L RVS 316 L (Inox)
Norm EN 10088-2