
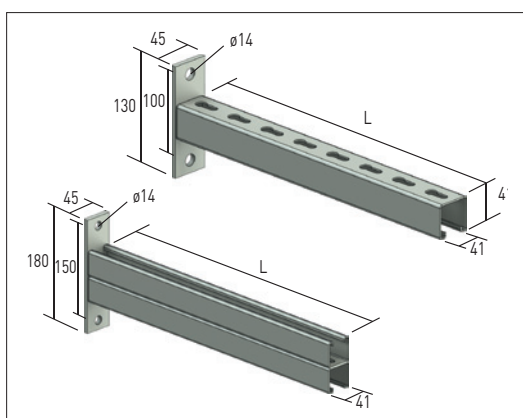


C41S - C41D

Consoles 41 enkel en dubbel voor zware belastingen

CABLOFIL


CF 30 met CF 105
L. 100 -> 600 mm

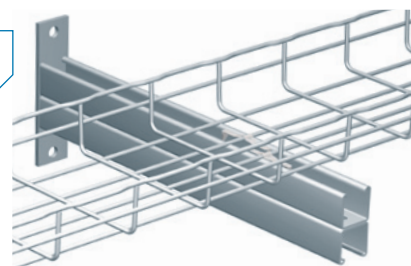


	Belasting (DaN)	L (mm)	Verp.	GC	316L
C41S150	500	150	20	CM595013	CM595014
C41S200	450	200	20	CM595023	CM595024
C41S300	340	300	16	CM595033	CM595034
C41S400	270	400	12	CM595043	CM595044
C41S500	270	500	8	CM595053	CM595054
C41S600	220	600	8	CM595063	CM595064
C41D300	520	300	8	CM596033	-
C41D400	430	400	4	CM596043	-
C41D500	430	500	4	CM596053	-
C41D600	400	600	4	CM596063	-

Bevestiging van de draadgoot

C41S



C41D

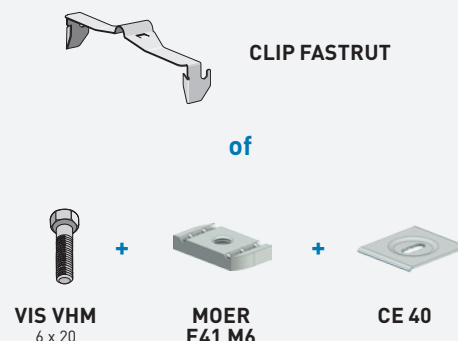

Draadgoten: keuzetabel

MATERIAALSOORTEN

EZ Elektrolytisch verzinkt Norm EN ISO 2081	DC Geomet bescherming
GS Sendzimir verzinkt Norm EN 10346	304L RVS 304 L (Inox) Norm EN 10088-2
PG Vóór fabricage verzinkt Norm EN 10244-2	316L RVS 316 L (Inox) Norm EN 10088-2
GC Thermisch verzinkt Norm EN ISO 1461	