



CAT40

Lichte console

CABLOFIL

CF 30 / CF 54
L. 50 -> 100 mm

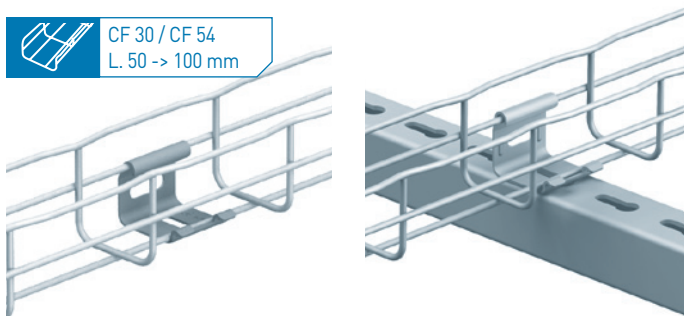




CAT40

	Belasting (DaN)	Verp.	GS	DC	304L	316L
CAT40	20	50	CM586190	CM586197	-	CM586194

Bevestiging van de draadgoot

CF 30

CF 54



Draadgoten: keuzetabel

MATERIAALSOORTEN

EZ Elektrolytisch verzinkt
Norm EN ISO 2081

GS Sendzimir verzinkt
Norm EN 10346

PG Vóór fabricage verzinkt
Norm EN 10244-2

GC Thermisch verzinkt
Norm EN ISO 1461

DC Geomet bescherming

304L RVS 304 L (Inox)
Norm EN 10088-2

316L RVS 316 L (Inox)
Norm EN 10088-2