
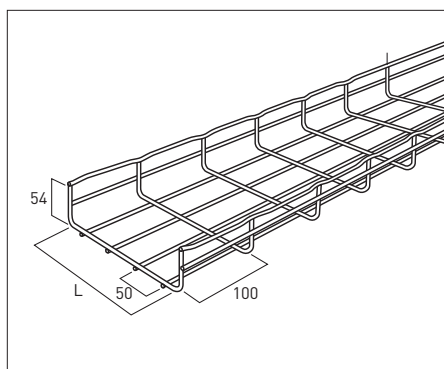
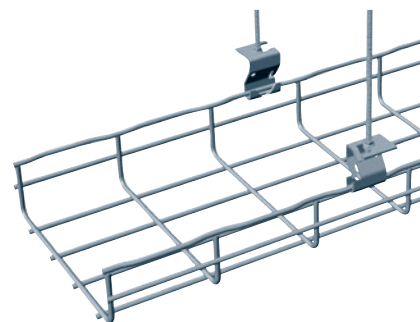


CF 54 Standard


Chemins de câbles en fils d'aciers soudés

CABLOFIL




	L (mm)	KG/m	EZ	EZ+	GC	304L	316L
CF 54/50	50	0,63	CM000061	CM000062	CM000063	CM000068	CM000064
CF 54/100	100	0,78	CM000071	CM000072	CM000073	CM000078	CM000074
CF 54/150	150	1,04	CM000081	CM000082	CM000083	CM000088	CM000084
CF 54/200	200	1,36	CM000091	CM000092	CM000093	CM000098	CM000094
CF 54/300	300	2,04	CM000101	CM000102	CM000103	CM000108	CM000104
CF 54/400	400	3,05	CM000201	CM000202	CM000203	CM000208	CM000204
CF 54/500	500	3,47	CM000301	CM000302	CM000303	CM000308	CM000304
CF 54/600	600	3,90	CM000401	CM000402	CM000403	CM000408	CM000404

CF 54

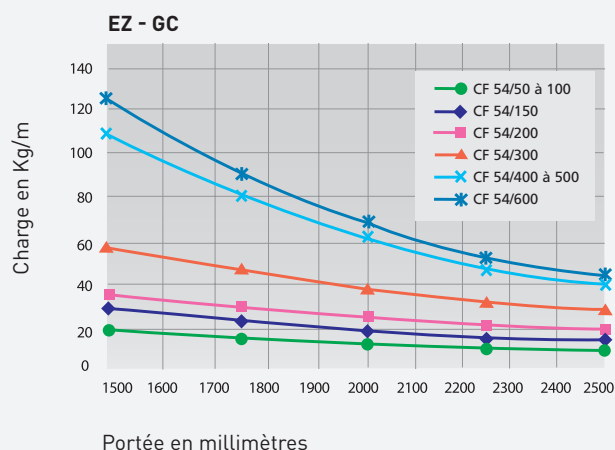

Méthode de test conforme aux spécifications de la norme européenne CEI/61537 de type 2.

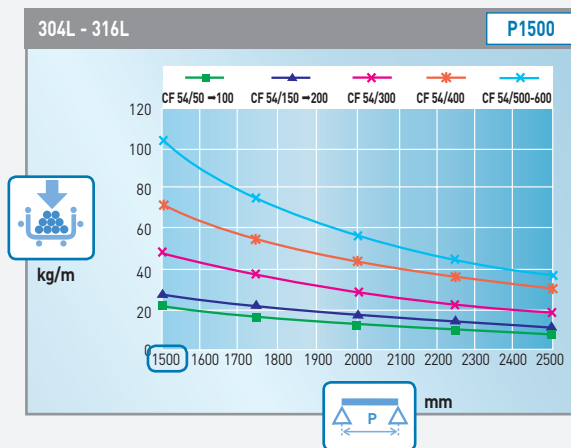

Choix des chemins de câbles

LES MATÉRIAUX

EZ Electrozingage après fabrication Norme EN ISO 2081	GC Galvanisé à chaud après fabri Norme EN ISO 1461
EZ+ Electrozingage après fabrication Plus Norme EN ISO 2081	DC Géomet
GS Galvanisation procédé Sendzimir Norme EN 10346	304L Inox 304 L Norme EN 10088-2
PG Galvanisation en continu Norme EN 10244-2	316L Inox 316 L Norme EN 10088-2

CF 54	Contenance maximum (Kg/m)	
	d = 0,15 (VDI)	d = 0,25 (puissance)
CF 54/50	3,9	6,5
CF 54/100	7,8	13,0
CF 54/150	11,7	19,5
CF 54/200	15,6	26,0
CF 54/300	23,4	39,0
CF 54/400	31,2	52,0
CF 54/500	39,0	65,0
CF 54/600	46,8	78,0

