






Legrand Group Belgium
Kouterveldstraat 9, 1831 Diegem
Tél.: [+32] 02 719 17 11 - Fax : [+32] 02 719 17 00

CF 105 Standard

Chemins de câbles en fils d'aciers soudés


CABLOFIL

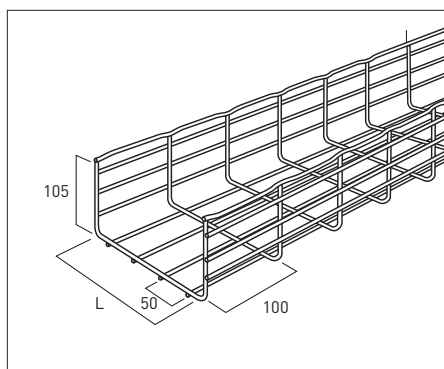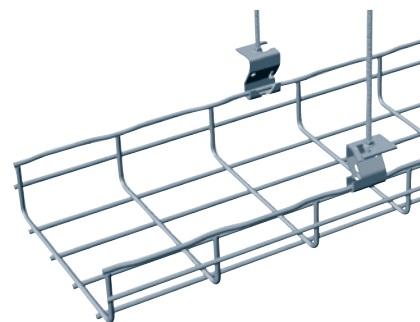

	L (mm)	KG/m	EZ	GC	304L	316L
CF 105/100	100	1,36	CM000891	CM000893	CM000898	CM000894
CF 105/150	150	1,74	CM000901	CM000903	CM000908	CM000904
CF 105/200	200	2,04	CM000911	CM000913	CM000918	CM000914
CF 105/300	300	3,05	CM000921	CM000923	CM000928	CM000924
CF 105/400	400	3,47	CM000931	CM000933	CM000938	CM000934
CF 105/500	500	3,90	CM000941	CM000943	CM000948	CM000944
CF 105/600	600	4,32	CM001031	CM001033	CM001038	CM001034


CF 105

EZ - GC

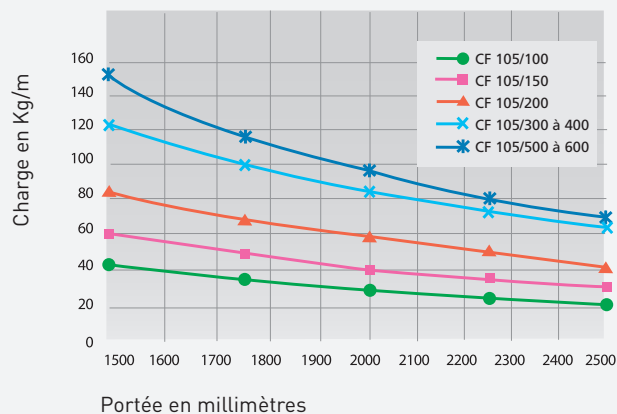

Méthode de test conforme aux spécifications de la norme européenne CEI/61537 de type 2.

304L - 316L

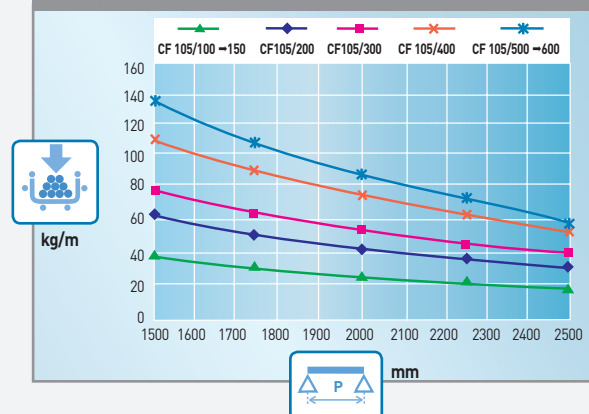

Choix des chemins de câbles

LES MATÉRIAUX

EZ Electrozingage après fabrication Norme EN ISO 2081	DC Géomet
GS Galvanisation procédé Sendzimir Norme EN 10346	304L Inox 304 L Norme EN 10088-2
PG Galvanisation en continu Norme EN 10244-2	316L Inox 316 L Norme EN 10088-2
GC Galvanisé à chaud après fabrication Norme EN ISO 1461	

CF 105	Contenance maximum (Kg/m)	
	d = 0,15 (VDI)	d = 0,25 (puissance)
CF 105/100	15,3	25,5
CF 105/150	23,0	38,3
CF 105/200	30,6	51,0
CF 105/300	45,9	76,5
CF 105/400	61,2	102,0
CF 105/500	76,5	127,5
CF 105/600	91,8	153

