





Legrand Group Belgium  
Kouterveldstraat 9, 1831 Diegem  
Tél.: [+32] 02 719 17 11 - Fax : [+32] 02 719 17 00

## CSN Consoles légères et moyennes système FAS

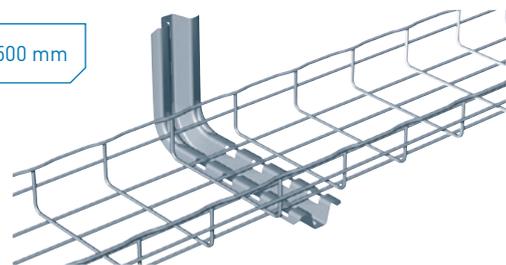

**CABLOFIL**

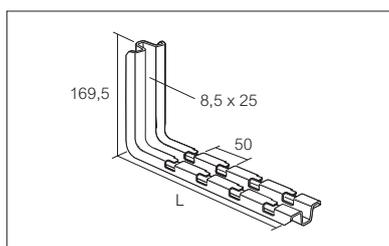


Épaisseur renforcée pour largeur 300.




	Charge (DaN)	L (mm)	Emb.	GS	GC	304L	316L
<b>CSN 100</b>	130	178	20	CM556100	CM556103	CM556108	CM556104
<b>CSN 150</b>	110	228	20	CM556110	CM556113	CM556118	CM556114
<b>CSN 200</b>	85	278	20	CM556120	CM556123	CM556128	CM556124
<b>CSN 300</b>	73	378	20	CM556130	CM556133	CM556138	CM556134
<b>CSN 400</b>	56	478	10	CM556140	CM556143	-	-
<b>CSN 450</b>	50	528	8	CM556150	CM556153	-	-

## Fixation du chemin de câbles

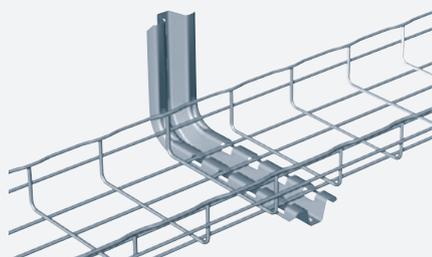

**FAS**  
FAST ASSEMBLY SYSTEM

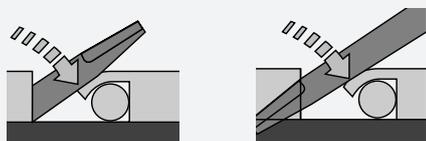

Recourber la patte d'accrochage sur le fil.

## Choix des chemins de câbles

### LES MATÉRIAUX

- |  |  |
|--|--|
| <b>EZ</b> Electrozingage après fabrication<br>Norme EN ISO 2081    | <b>DC</b> Géomet                           |
| <b>GS</b> Galvanisation procédé Sendzimir<br>Norme EN 10346        | <b>304L</b> Inox 304 L<br>Norme EN 10088-2 |
| <b>PG</b> Galvanisation en continu<br>Norme EN 10244-2             | <b>316L</b> Inox 316 L<br>Norme EN 10088-2 |
| <b>GC</b> Galvanisé à chaud après fabrication<br>Norme EN ISO 1461 |  |