
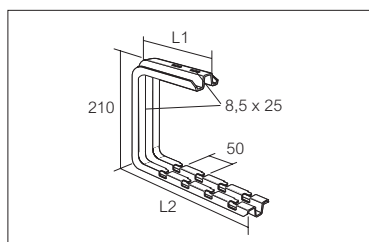


CSNC Plafond [beugels FAS

CABLOFIL

 L.100 -> 500 mm

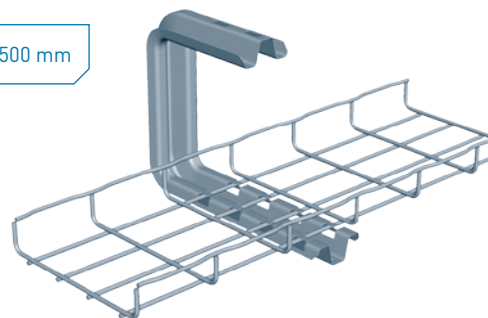

Grotere dikte voor breedte 300 mm.



	Belasting (DaN)	L1 (mm)	L2 (mm)	Verp.	GS	DC	316L
CSNC 100	120	170	178	10	CM556300	CM556303	CM556304
CSNC 150	100	170	228	10	CM556310	CM556313	CM556314
CSNC 200	80	170	278	10	CM556320	CM556323	CM556324
CSNC 300	70	288	378	10	CM556330	CM556333	-
CSNC 400	48	288	478	4	CM556340	CM556343	-
CSNC 450	44	288	528	4	CM556350	CM556353	-

Bevestiging van de draadgoot



FAS
FAST ASSEMBLY SYSTEM



Plooi de bevestigingshaak om tot tegen de draad.

Draadgoten: keuzetabel

MATERIAALSOORTEN

EZ Elektrolytisch verzinkt
Norm EN ISO 2081

GS Sendzimir verzinkt
Norm EN 10346

PG Vóór fabricage verzinkt
Norm EN 10244-2

GC Thermisch verzinkt
Norm EN ISO 1461

DC Geomet bescherming

304L RVS 304 L (Inox)
Norm EN 10088-2

316L RVS 316 L (Inox)
Norm EN 10088-2