





Legrand Group Belgium
Kouterveldstraat 9, 1831 Diegem
Tel.: [+32] 02 719 17 11 - Fax : [+32] 02 719 17 00

RCSN

Rail voor muur of vloer bevestiging FAS


CABLOFIL

CF 30 met CF 105
L. 100 -> 600 mm

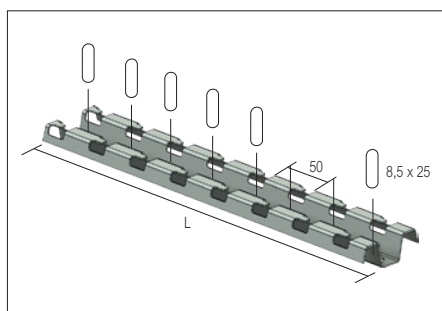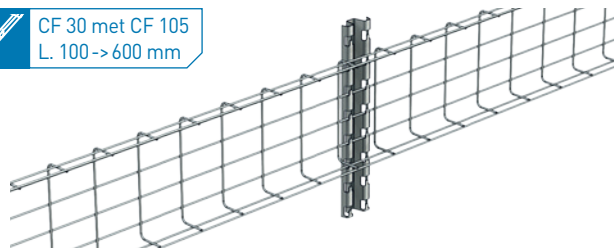

	Belasting (DaN)	L (mm)	Verp.	GS	GC	304L	316L
RCSN150	100	150	10	CM013150	CM013153	-	CM013154
RCSN200	100	200	10	CM013200	CM013203	-	CM013204
RCSN300	100	300	10	CM013300	CM013303	-	CM013304
RCSN400	100	400	10	CM013400	CM013403	-	CM013404
RCSN500	100	500	10	CM013500	CM013503	-	-
RCSN550	100	550	20	CM013550	CM013553	-	-
RCSN600	100	600	10	CM013600	CM013603	-	CM013604
RCSN1000	100	1000	1	CM013010	CM013013	-	CM013014
RCSN2000	100	2000	1	CM013020	CM013023	CM013028	CM013024
RCSN3000	100	3000	1	CM013030	CM013033	CM013038	CM013028

Bevestiging van de draadgoot

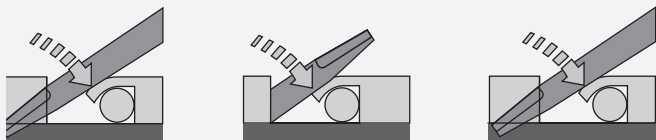

FAS
FAST ASSEMBLY SYSTEM

Plooi de bevestigingshaak om tot tegen de draad.

Draadgoten: keuzetabel

MATERIAALSOORTEN

EZ Elektrolytisch verzinkt
Norm EN ISO 2081

GS Sendzimir verzinkt
Norm EN 10346

PG Vóór fabricage verzinkt
Norm EN 10244-2

GC Thermisch verzinkt
Norm EN ISO 1461

DC Geomet bescherming

304L RVS 304 L (Inox)
Norm EN 10088-2

316L RVS 316 L (Inox)
Norm EN 10088-2