

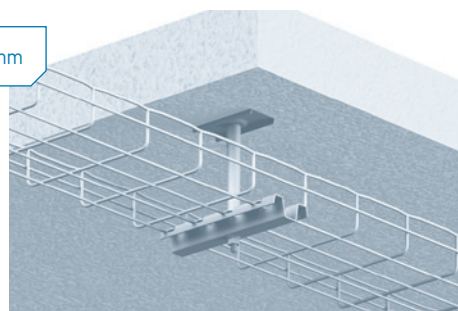


SCF

Suspension centrale filetée

CABLOFIL

L. 100 -> 600 mm





	Charge (DaN)	L (mm)	Emb.	GS
SCF200	200	194	10	CM586200
SCF300	160	294	10	CM586300
SCF400	140	394	10	CM586400
SCF500	120	494	10	CM586500
SCF600	100	594	10	CM586600
PFSCF - PLATINE	-	100	50	CM586210


	H1 (mm)	Emb.	GS
EXT-SCF50	50	50	CM586810
EXT-SCF100	100	100	CM586820
EXT-SCF150	150	50	CM586830



PFSCF



EXT-SCF



Choix des chemins de câbles

LES MATÉRIAUX

EZ Electrozingage après fabrication Norme EN ISO 2081	DC Géomet
GS Galvanisation procédé Sendzimir Norme EN 10346	304L Inox 304 L Norme EN 10088-2
PG Galvanisation en continu Norme EN 10244-2	316L Inox 316 L Norme EN 10088-2
GC Galvanisé à chaud après fabrication Norme EN ISO 1461	