



SCF

Centrale ophanging met draadstang

CABLOFIL


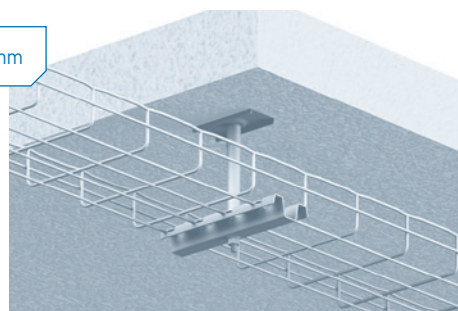


	Belasting (DaN)	L (mm)	Verp.	GS
SCF200	200	194	10	CM586200
SCF300	160	294	10	CM586300
SCF400	140	394	10	CM586400
SCF500	120	494	10	CM586500
SCF600	100	594	10	CM586600
PFSCF - PLATINE	-	100	50	CM586210




	H1 (mm)	Verp.	GS
EXT-SCF50	50	50	CM586810
EXT-SCF100	100	100	CM586820
EXT-SCF150	150	50	CM586830

PFSCF



EXT-SCF



Draadgoten: keuzetabel

MATERIAALSOORTEN

EZ Elektrolytisch verzinkt
Norm EN ISO 2081

GS Sendzimir verzinkt
Norm EN 10346

PG Vóór fabricage verzinkt
Norm EN 10244-2

GC Thermisch verzinkt
Norm EN ISO 1461

DC Geomet bescherming

304L RVS 304 L (Inox)
Norm EN 10088-2

316L RVS 316 L (Inox)
Norm EN 10088-2