





Legrand Group Belgium
Kouterveldstraat 9, 1831 Diegem
T (+32) 02 719 17 11 - F (+32) 02 719 17 00


EZP233WT, EZP333WT, EZP433WT, EZP733WT

Wall thickness	Flexible and rigid ≥ 122 mm	Rigid ≥ 150 mm
Cable diameter	OD ≤ Ø21mm	Ø21mm < OD ≤ Ø50mm
Performance	EI120	EI60 / EI20
Fire resistance	EN 1366-3 / EN 13501-2	
Cable loading	0% to 100%	
Certification	ETA - 13/0887	


Opening size	EZP233WT	155 x 81 mm
	EZP333WT	230 x 81 mm
	EZP433WT	305 x 81 mm
	EZP733WT	540 x 81 mm

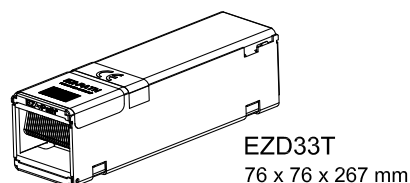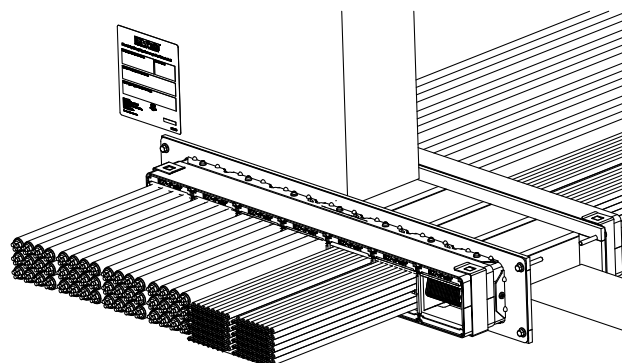


EZP233WT + 2 x EZD33T





EZP333WT + 3 x EZD33T



EZP433WT + 4 x EZD33T

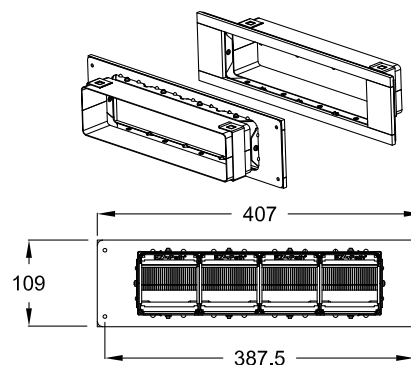

EZP733WT + 7 x EZD33T

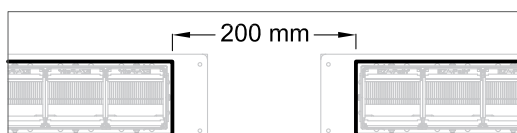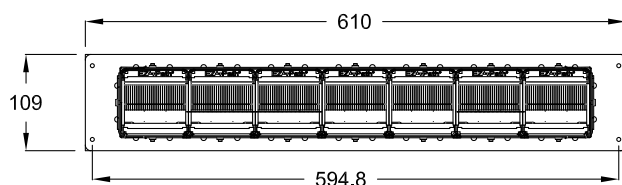

Minimum distance between penetration seals

Not at scale. Units in millimeters
Please refer to the Installation Sheet

