


# EZP133CWT


| Wall thickness                                                                                  | Flexible and rigid wall |          | Rigid wall         |
|-------------------------------------------------------------------------------------------------|-------------------------|----------|--------------------|
|                                                                                                 | ≥ 100 mm                | ≥ 122 mm |                    |
| Cable diameter                                                                                  | OD ≤ Ø 21 mm            |          | Ø21mm < OD ≤ Ø50mm |
| Performance                                                                                     | EI 60 / E120            | EI 120   | EI 60 / E120       |
| Fire resistance                                                                                 | EN 1366-3 / EN 13501-2  |          |                    |
| Opening size                                                                                    | Ø 102 mm or 78 x 78 mm  |          |                    |
| Cable loading                                                                                   | 0% to 100%              |          |                    |
| Certification  | ETA - 13/0887           |          |                    |

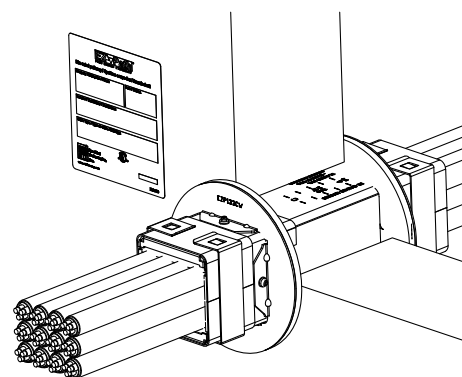

Not at scale. Units in millimeters


Please refer to EZP133CWT Installation Sheet

EZP133CWT

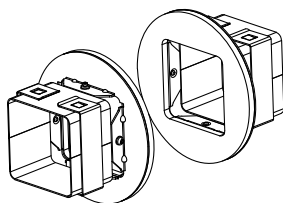




+

EZD33T

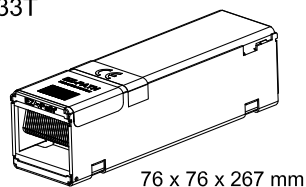

76 x 76 x 267 mm

Stone wool min. 45 kg/m3  
in <122mm thick wall for  
**circular opening Ø**

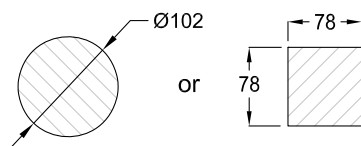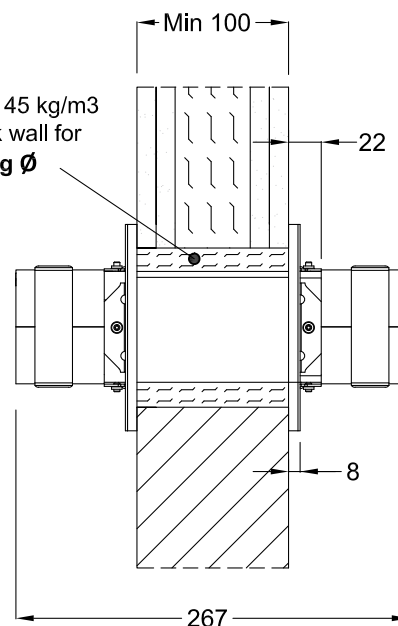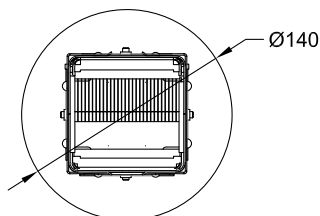

Opening size (mm)

