


EZ-PATH® Fire Rated Pathway Series 44+

All types of cables
outside diameter
≤ Ø80 mm



FIRE RESISTANCE CLASSIFICATION

			Flexible wall ≥122mm 	Rigid wall ≥122mm  ≥150mm 		Rigid Floor ≥150mm 
EZ-PATH Systems		Ø Cables (mm)				
Device(s)	Plate kit					
1 x EZD44T	EZP144WT	OD ≤ Ø 80	EI120	EI120	EI120 / E180	-
1 - 5 x EZD44T	EZP544WT	OD ≤ Ø 80	EI120	EI120	EI120 / E180	-
1 x EZD44T	EZG144T	OD ≤ Ø 50	-	-	-	EI120 / E180
		OD ≤ Ø 80	-	-	-	EI90 / E180
4 x EZD44T	EZG444T	OD ≤ Ø 80	-	-	-	EI120 / E180


Please refer to ETA 13/0887 and corresponding Application Sheets and Installation Sheets for additional information

ORDERING INFORMATION

EZ-Path Fire Rated Pathway Series 44+


EZD44T

EZ-Path device
weight : 2.67 kg




EZP144WT

Single wall plate
weight : 2.52 kg

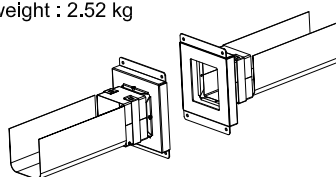


EZG144T

Single floor plate
weight : 3.14 kg

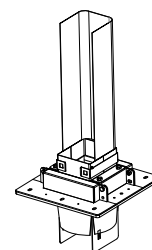


EZD44ES

Extension device
for thicker barrier
weight : 1.11 kg




EZP544WT

One to five gang wall plate
weight : 5.76 kg

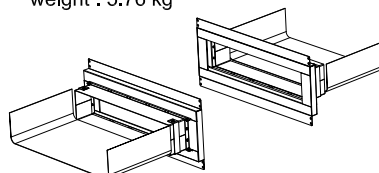

EZG444T

Four gang floor plate
weight : 9.07 kg

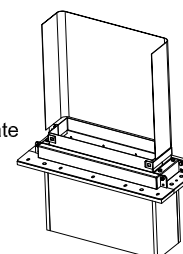


EZ-PATH® **Fire Rated Pathway Series 44+**


All types of cables
outside diameter
≤ Ø80 mm



EZD44T + EZP144WT

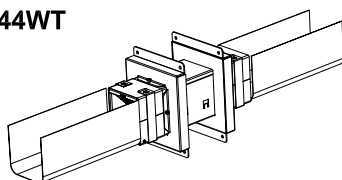


Opening dimension	Ø152 mm
Flexible and rigid walls	≥ 122 mm
Fire resistance performance	EI 120

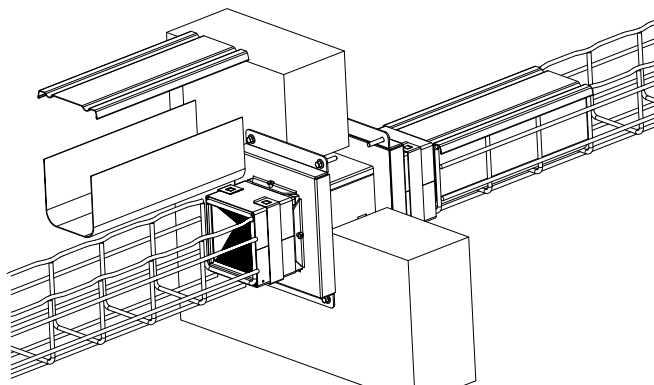


EZD44T + EZP544WT


up to five devices

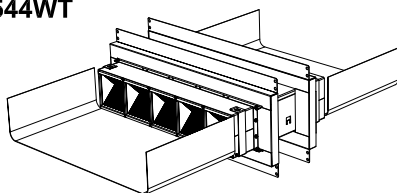

Opening dimension	Refer to installation instruction
Flexible and rigid walls	≥ 122 mm
Fire resistance performance	EI 120

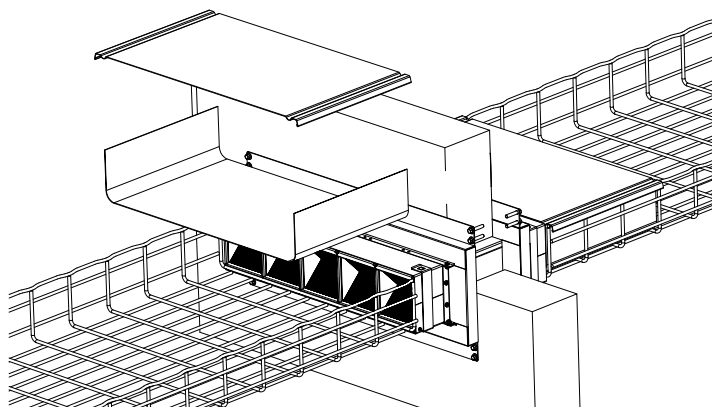


EZD44T + EZG144T

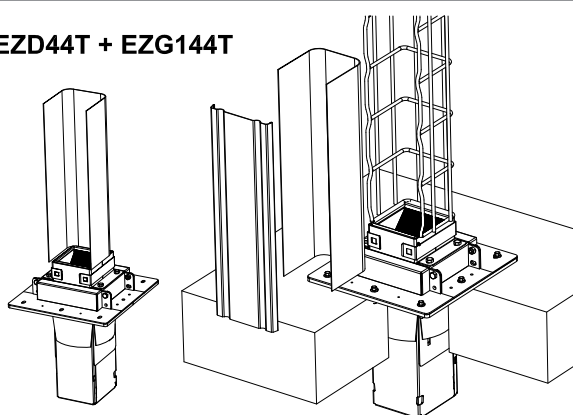

Opening dimension	Ø152 mm
Rigid floor	≥ 150 mm
Fire resistance performance	up to EI 120

4 x EZD44T + EZG444T

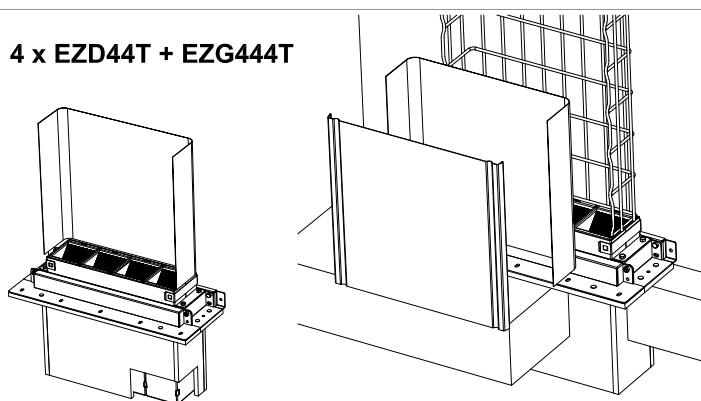

Opening dimension	445 x 155 mm
Rigid floor	≥ 150 mm
Fire resistance performance	EI 120

Please refer to ETA 13/0887 and corresponding Application Data Sheet and Installation Sheets