




EZ-PATH® Fire Rated Pathway Series 44+

All types of cables
outside diameter
≤ Ø21 mm



FIRE RESISTANCE CLASSIFICATION

EZ-PATH Systems			Flexible wall		Rigid wall			Rigid Floor
			≥100mm 	≥122mm 	≥100mm 	≥122mm 	≥150mm 	≥150mm 
Device(s)	Plate kit	Ø Cables (mm)						
1 x EZD44T (grouted with mortar)	-	OD ≤ Ø 21	-	-	EI90 / E240	EI90 / E240	EI120 / E240	-
2 - 5 x EZD44T (grouted with mortar)	-	OD ≤ Ø 21	-	-	EI90 / E240	EI90 / E240	EI90 / E240	-
1 x EZD44T	EZP144WE	OD ≤ Ø 21	EI90 / EI120	EI90 / EI120	EI90 / EI120	EI90 / EI120	EI120 *	-
1 x EZD44T	EZP144RSE	OD ≤ Ø 21	EI90 / EI120	EI90 / EI120	EI90 / EI120	EI90 / EI120	EI120 *	-
1 x EZD44T	EZP144WT	OD ≤ Ø 21	-	EI120	-	EI120	EI120 / EI180	-
1 - 5 x EZD44T	EZP544WE	OD ≤ Ø 21	EI120	EI120	EI120	EI120	EI120	-
1 x EZD44T	EZP144MBE	OD ≤ Ø 21	-	-	-	-	-	EI120
2 - 5 x EZD44T	EZP544MBE	OD ≤ Ø 21	-	-	-	-	-	EI120

Please refer to ETA 13/0887 and corresponding Application Sheets and Installation Sheets for additional information

EZ-PATH® can be used with plastic conduits. Please contact us for more information.

In rigid walls, when space around devices is filled with construction mortar, integrity performance achieves E240.


* For telecommunication cables OD ≤ Ø 21, system achieves EI120. For all types of cables OD ≤ Ø 21, system achieves EI90 / E120.

ORDERING INFORMATION

EZ-Path Fire Rated Pathway Series 44+


EZD44T

EZ-Path device
weight : 2.67 kg




EZD44ES

Extension device
for thicker barrier
weight : 1.11 kg




EZP144WE

Single wall plate
weight : 1.40 kg




EZP144RSE

Single retrofit wall plate
for existing cables
weight : 1.60 kg




EZP144WT

Single wall plate
weight : 2.52 kg




EZP544WE

One to five gang wall plate
weight : 2.40 kg




EZP144MBE

Single floor brackets
weight : 0.50 kg



EZP544MBE

Two to five gang floor brackets
weight : 0.80 kg




EZ-PATH® Fire Rated Pathway Series 44+


All types of cables
outside diameter
≤ Ø21 mm




EZD44T (grouted)

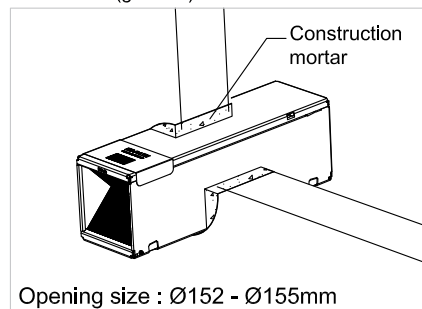


EZD44T (grouted)

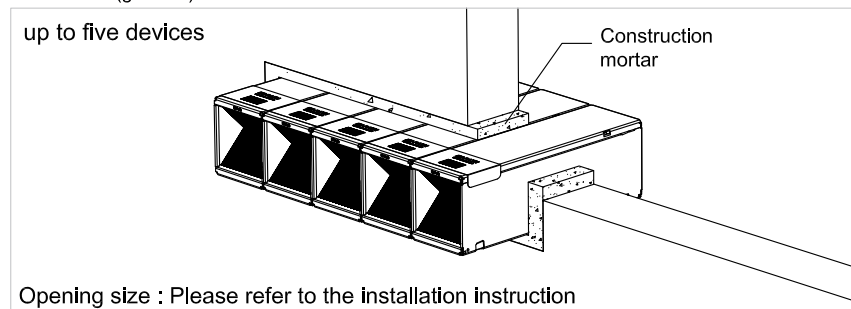


EZD44T + EZP144WE

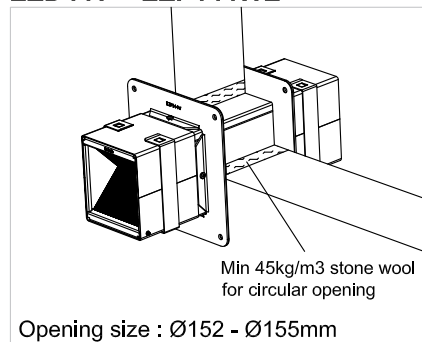


EZD44T + EZP144RSE

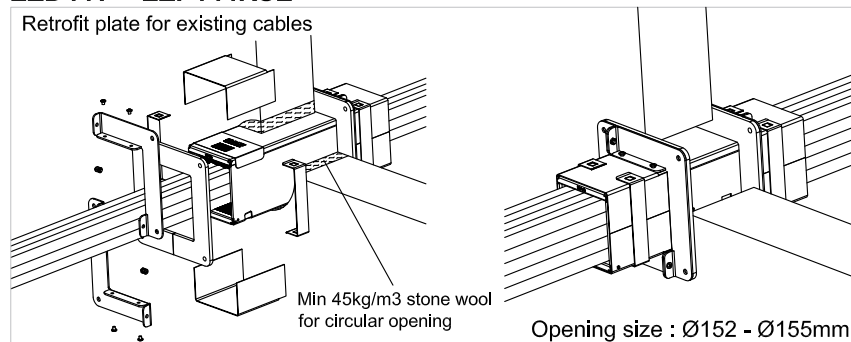


EZD44T + EZP144WT

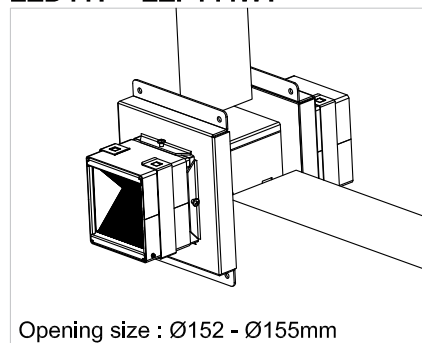


EZD44T + EZP544WE

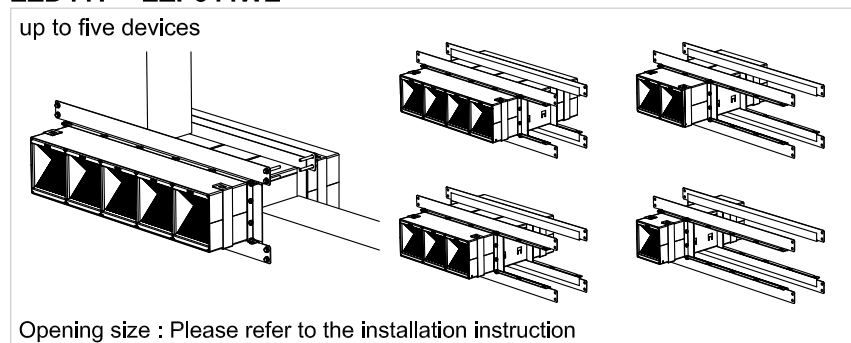

EZD44T + EZP144MBE

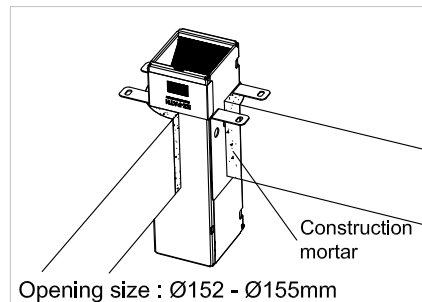

EZD44T + EZP544MBE

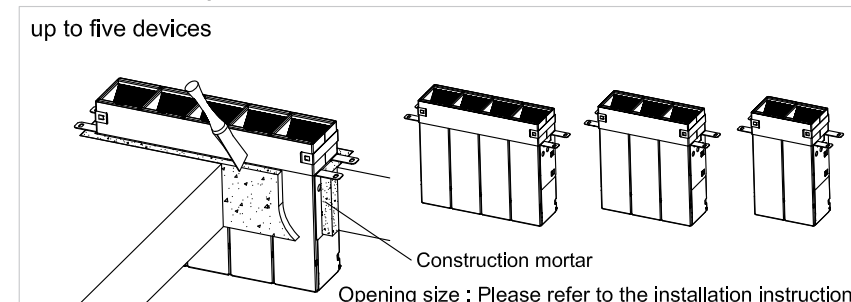

Please refer to ETA 13/0887 and corresponding Application Sheets and Installation Sheets for additional information