



EZ-PATH® Fire Rated Pathway Series 44+

All types of cables
outside diameter
≤ Ø21 mm




EZD44T Devices + EZP544WE Plate Kit

up to five devices

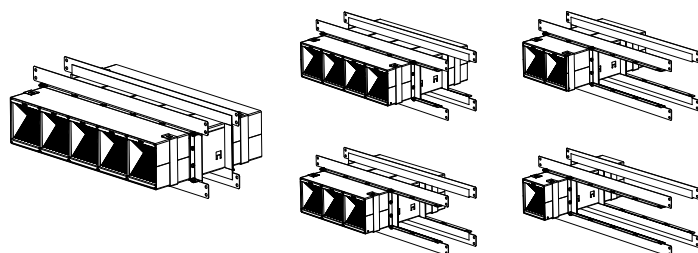




Ø Cables (mm)	OD ≤ Ø 21
Flexible and rigid walls	≥100mm
Fire resistance performance	EI90 / E120

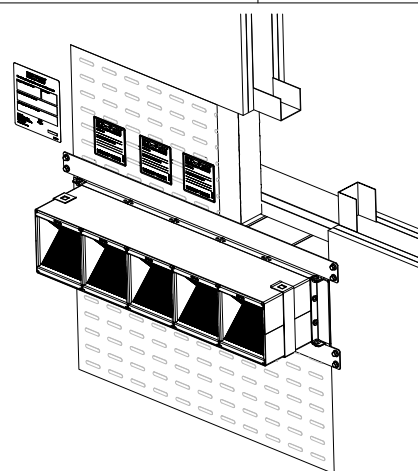


Please refer to ETA 13/0887 and corresponding Installation Instruction

EZD44T + EZP544MBE Plate Kit

up to five devices

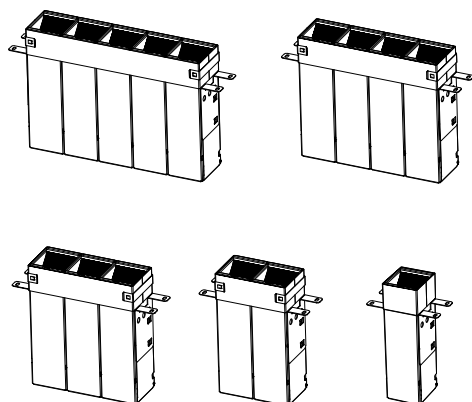

Ø Cables (mm)	OD ≤ Ø 21
Rigid floor	≥150mm
Fire resistance performance	EI120

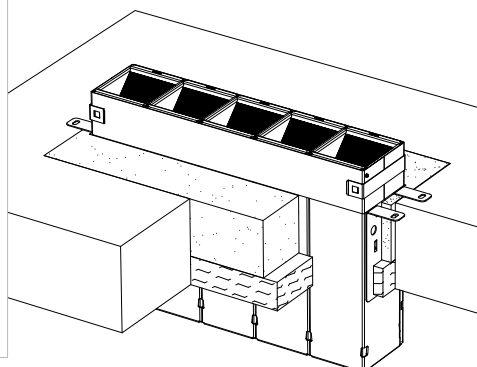

Please refer to ETA 13/0887 and corresponding Installation Instruction