

EZP544MBE


Technical Data

Floor thickness	≥ 150 mm
Ø cable	$OD \leq \varnothing 21$ mm
Cable loading	0% to 100%
Opening size	page 2/2
Performance	EI 120
Fire resistance	EN 1366-3 / EN 13501-2
Certification 	ETA - 13/0887


Max 16.6 mm Ø PVC tubes can be installed in EZ-Path® in association with cables. Please contact the STI representative for more information

Not at scale. Units in millimeters


Please refer to the EZP544MBE Installation Sheet

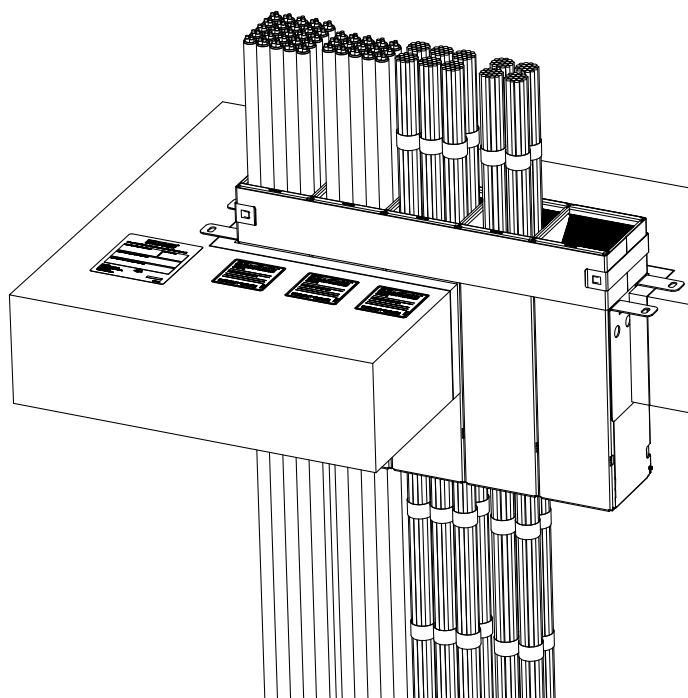




EZP544MBE

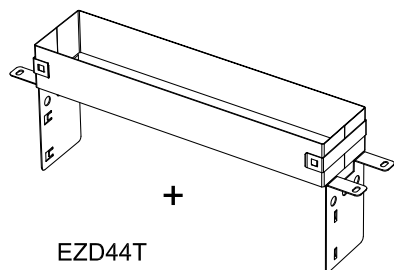


EZD44T
2x up to 5x




116 x 102 x 356 mm

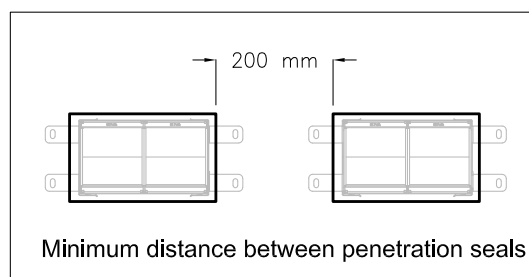


EZP544MBE
+ 2x EZD44T



EZP544MBE
+ 3x EZD44T



EZP544MBE
+ 4x EZD44T

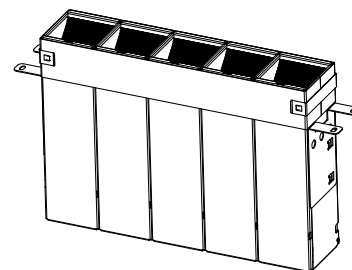

EZP544MBE
+ 5x EZD44T

EZP544MBE

