

EZP144WE

Technical Data


Type of wall	Flexible and rigid	Rigid
Wall thickness	≥ 100 mm	≥ 150 mm
Cable diameter	OD ≤ Ø 21 mm	OD ≤ Ø 21 mm Telecommunication cables
Performance	EI90 / EI120	EI120

Cable loading	0% to 100%
Opening size	Ø152 - Ø155 mm or 118 x 105 mm
Fire resistance	EN 1366-3 / EN13501-2
Certification 	ETA - 13/0887


Max 16.6 mm Ø PVC tubes can be installed in EZ-Path® in association with cables. Please contact the STI representative for more information

Not at scale. Units in millimeters

Please refer to the EZP144WE Installation Sheet

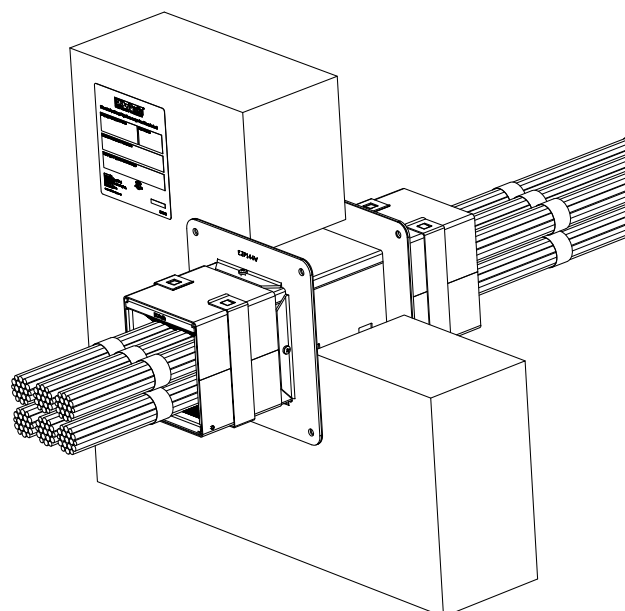


EZP144WE




+



EZD44T




116 x 102 x 356 mm

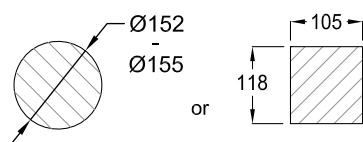

Opening size (mm)

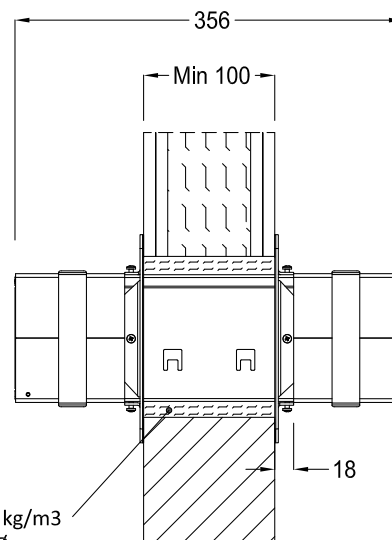

Stone wool min. 45 kg/m³
in circular opening Ø

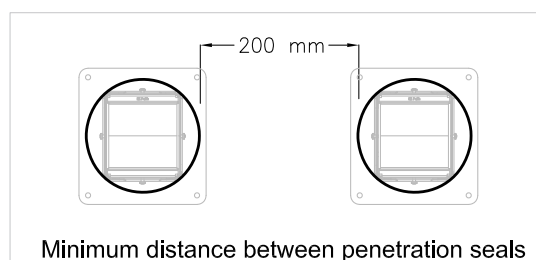

Minimum distance between penetration seals