

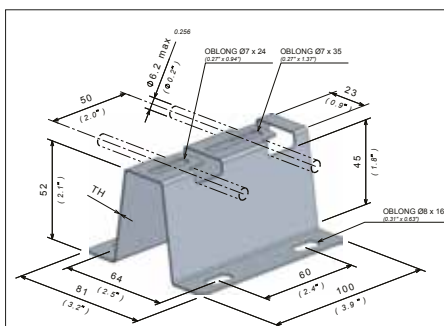
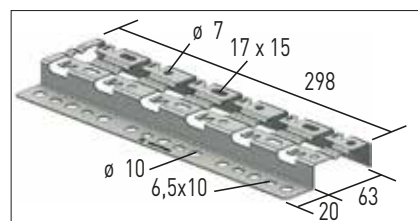
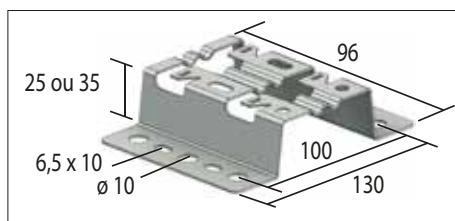


R15 - R25 - R35 - R50

Réhaussees pour pose au sol

CABLOFIL®

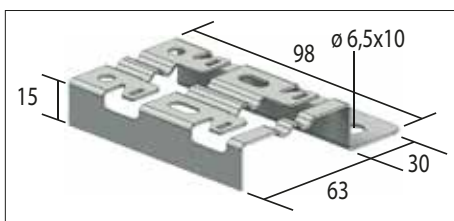

R50



	Charge (DaN)	Verp.			
R15/100	50	10	CM586170	CM586173	CM586174
R15/300	100	10	CM586610	CM586617	-
R25	50	10	CM586640	CM586647	-
R35	50	10	CM586650	CM586657	-
R50	150	10	CM348530	CM348532	CM348531

Choix des chemins de câbles

- | | | | |
|---|--|---|--|
|  | Electrozincage après fabrication
Norme EN ISO 2081 |  | Géomet |
|  | Galvanisation procédé Sendzimir
Norme EN 10346 |  | Inox 304 L
Norme EN 10088-2 |
|  | Galvanisation en continu
Norme EN 10244-2 |  | Inox 316 L
Norme EN 10088-2 |
|  | Galvanisé à chaud après fabrication
Norme EN ISO 1461 |  | Zinc-magnésium
Norme NEN-EN-IEC 61537 |