

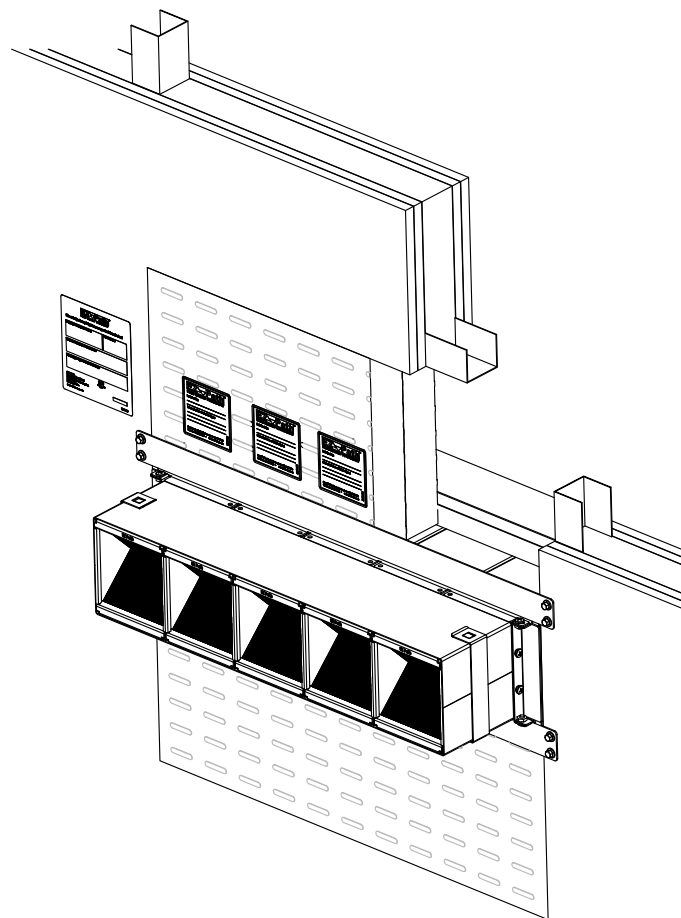
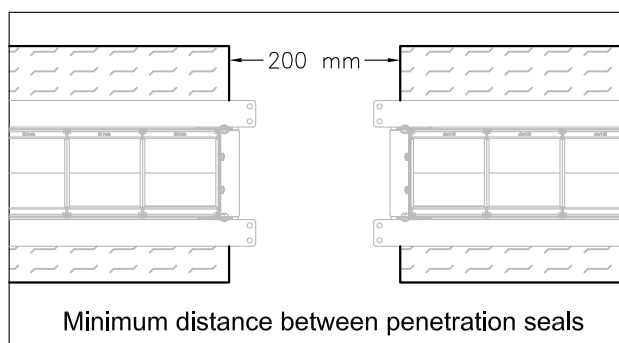


Rigid walls and flexible walls


Wall thickness	≥ 100mm
Ø cable	OD ≤ Ø 21 mm
Cable loading	0% to 100%
Opening size	Max 568mm x 800mm
Performance	EI 90 / E 120
Fire resistance	EN 1366-3
Classification	EN 13501-2

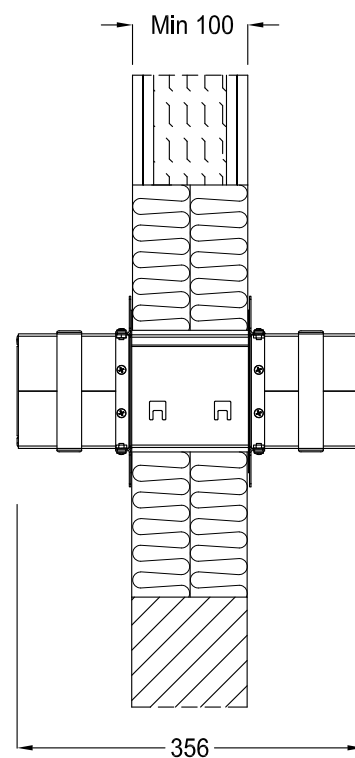


Ordering information

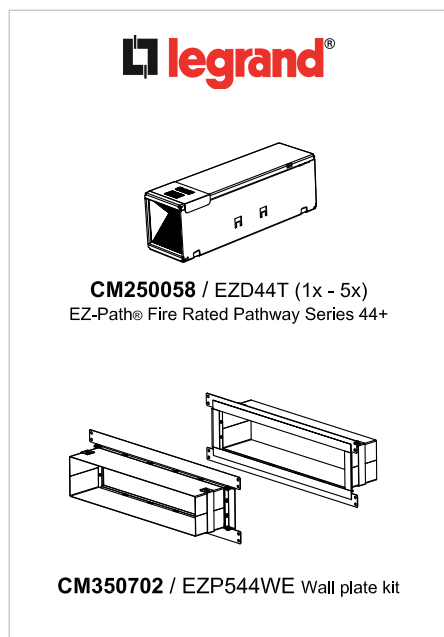

CM350702
EZP544WE




16x



or





Min Ø5 x 40mm








1

Construction to be cleaned

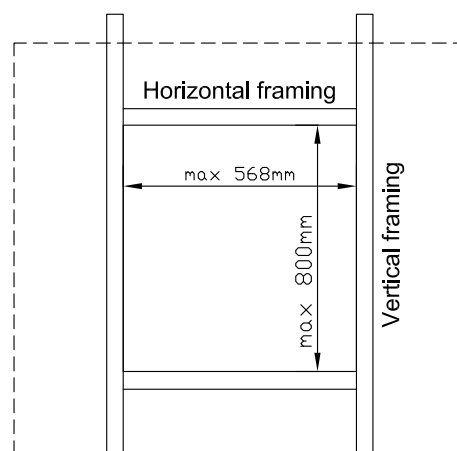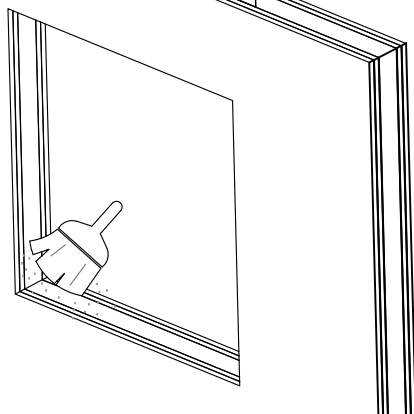



Maximum 800 mm x 568 mm opening







Distance between attachment holes of the CM350702 (EZP544WE) = 594mm

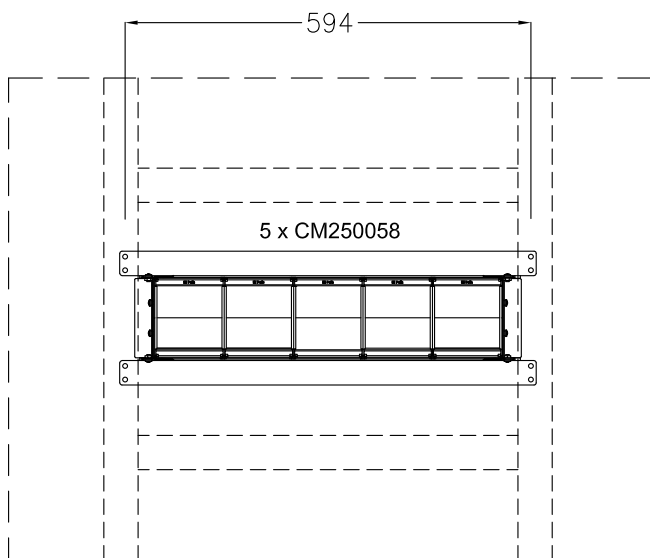


Not at scale. Units in millimeters

Cutting dimensions of mineral wool coated board

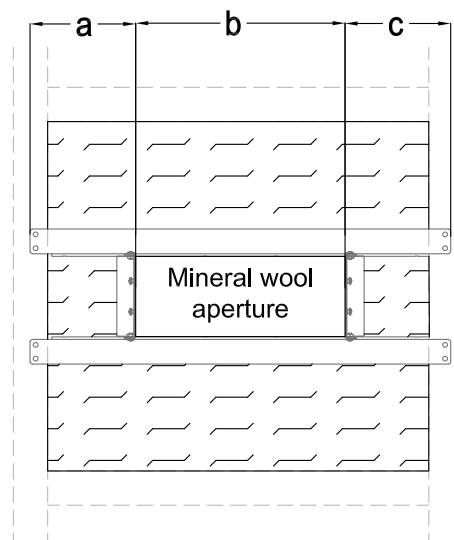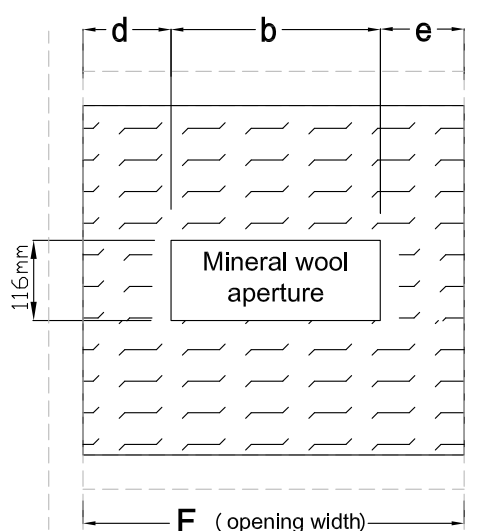


	b	d	e	a	c
	510mm	$\frac{1}{2} \times F - 255\text{mm}$	$e = d$	50mm	50mm
	408mm	$\frac{1}{2} \times F - 255\text{mm}$	$\frac{1}{2} \times F - 153\text{mm}$	50mm	152mm
	306mm	$\frac{1}{2} \times F - 255\text{mm}$	$\frac{1}{2} \times F - 51\text{mm}$	50mm	254mm
	306mm	$\frac{1}{2} \times F - 153\text{mm}$	$e = d$	152mm	152mm
	204mm	$\frac{1}{2} \times F - 255\text{mm}$	$\frac{1}{2} \times F + 51\text{mm}$	50mm	356mm
	204mm	$\frac{1}{2} \times F - 153\text{mm}$	$\frac{1}{2} \times F - 51\text{mm}$	152mm	254mm
	102mm	$\frac{1}{2} \times F - 255\text{mm}$	$\frac{1}{2} \times F + 153\text{mm}$	50mm	458mm
	102mm	$\frac{1}{2} \times F - 153\text{mm}$	$\frac{1}{2} \times F + 51\text{mm}$	152mm	356mm
	102mm	$\frac{1}{2} \times F - 51\text{mm}$	$e = d$	254mm	254mm


F = opening width
b = mineral wool aperture
d = left horizontal position of aperture
e = right horizontal position of aperture
a = position of aperture from the left side of CM350702 plate
c = position of aperture from the right side of CM350702 plate
116 mm = opening height
Tolerance + 1mm

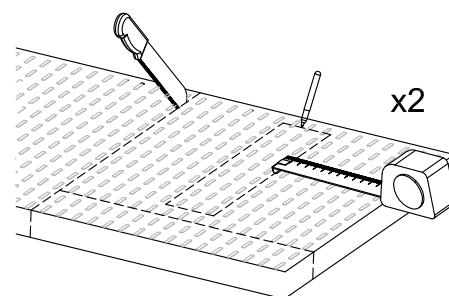


CM250058
EZD44T

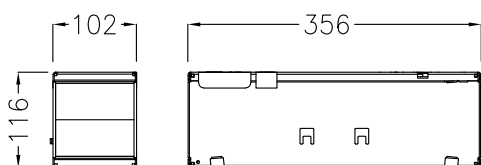

CM350702
EZP544WE

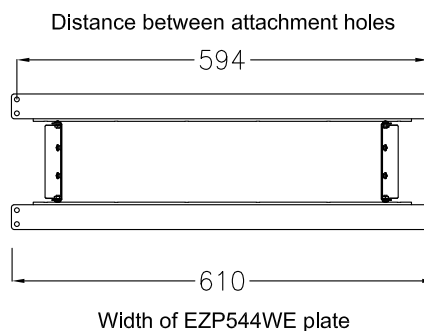




2


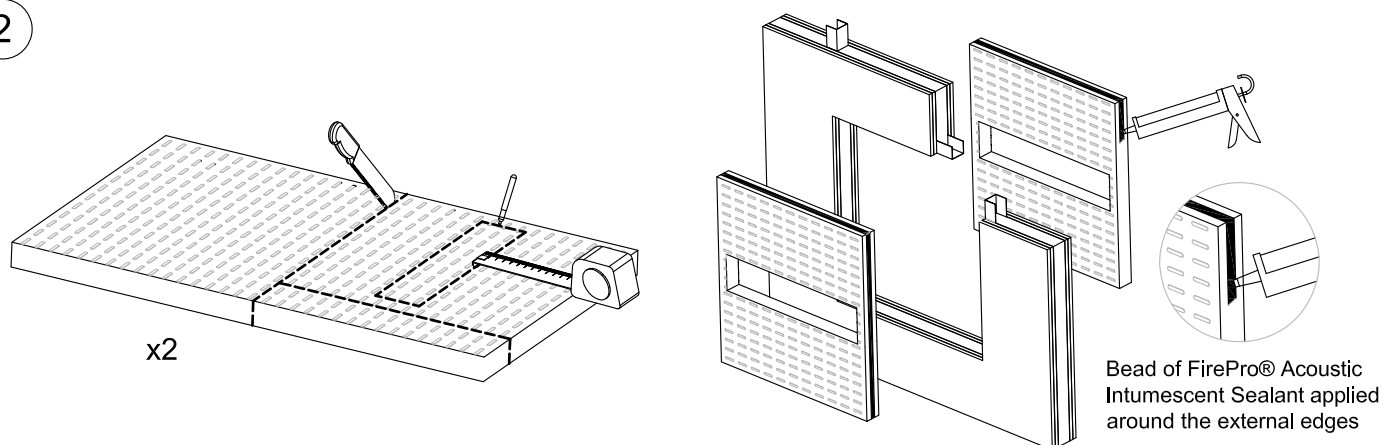




3

CM250058 / EZD44T (1 - 5x)


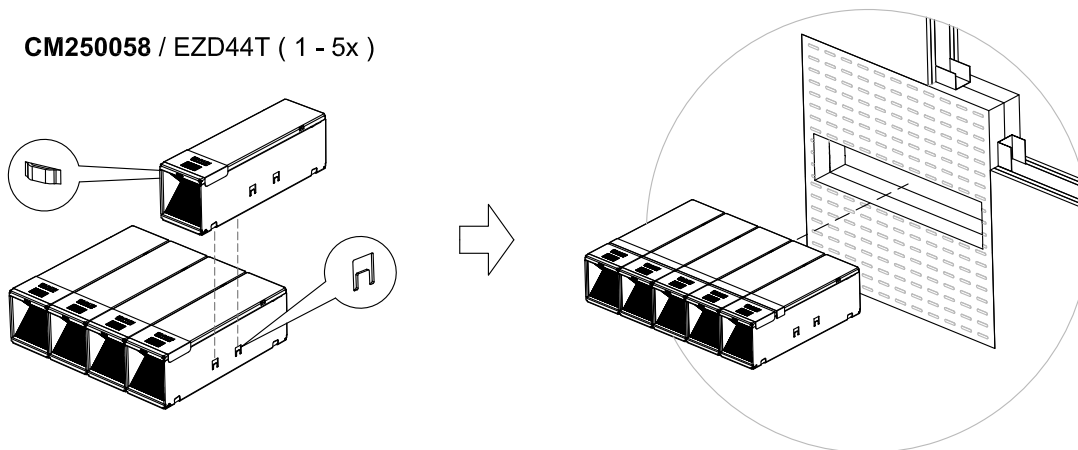


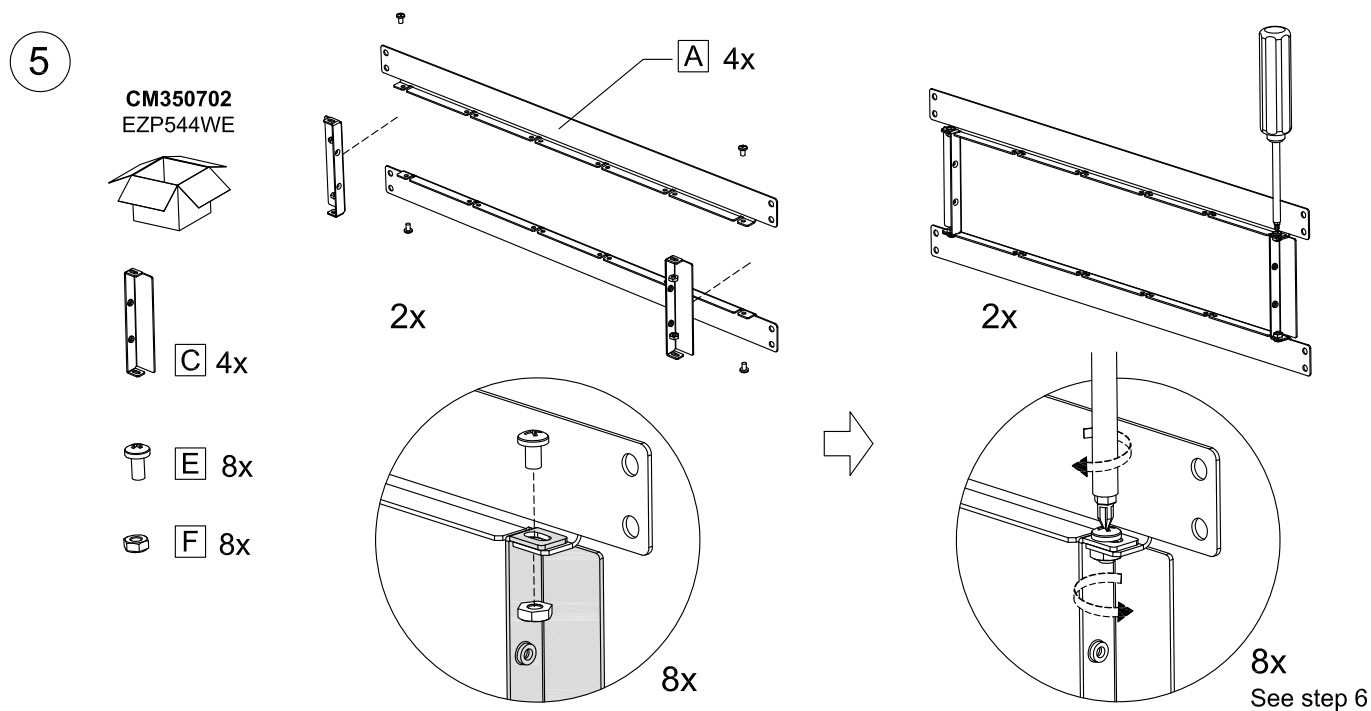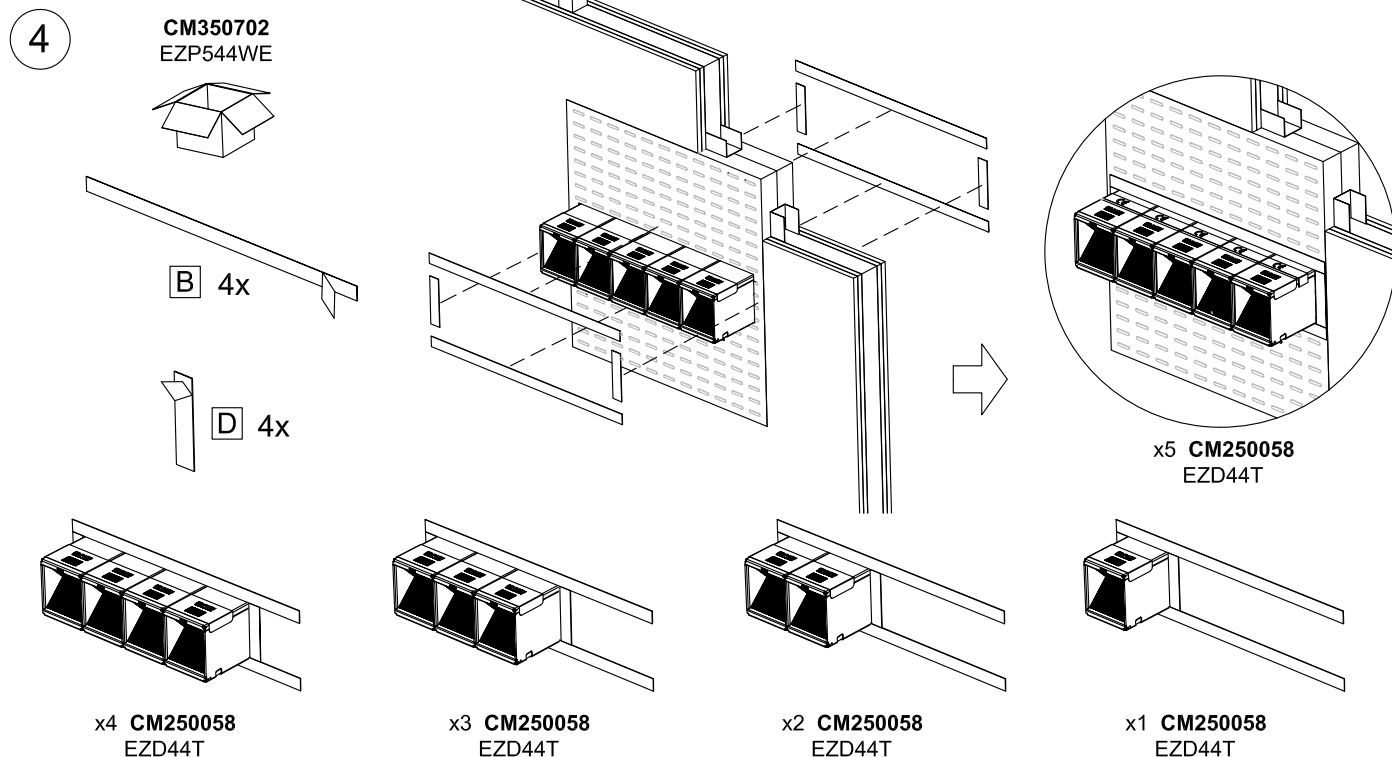

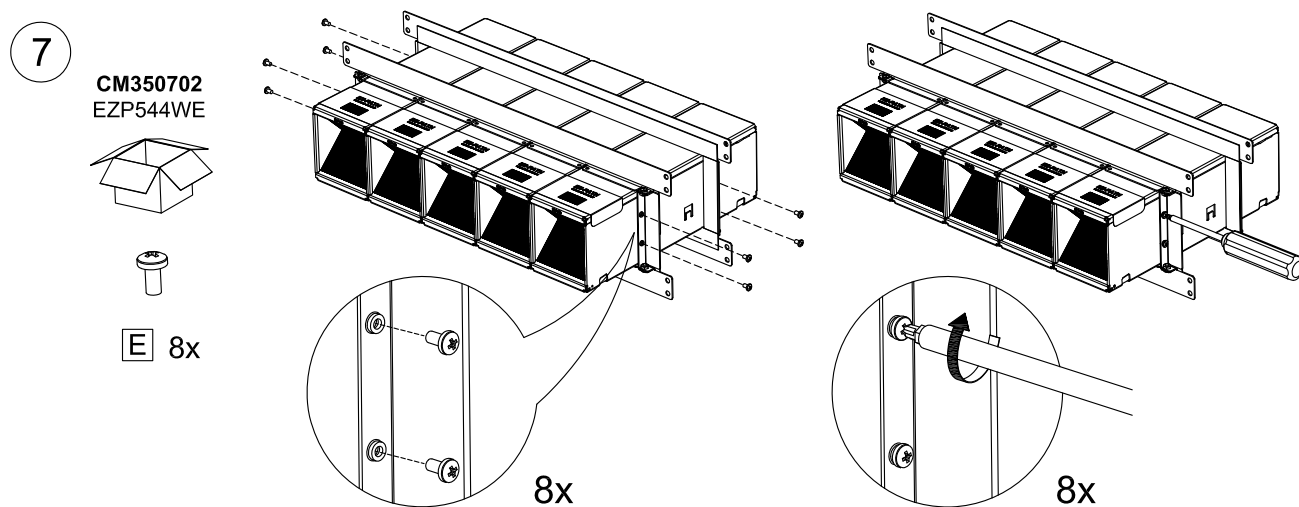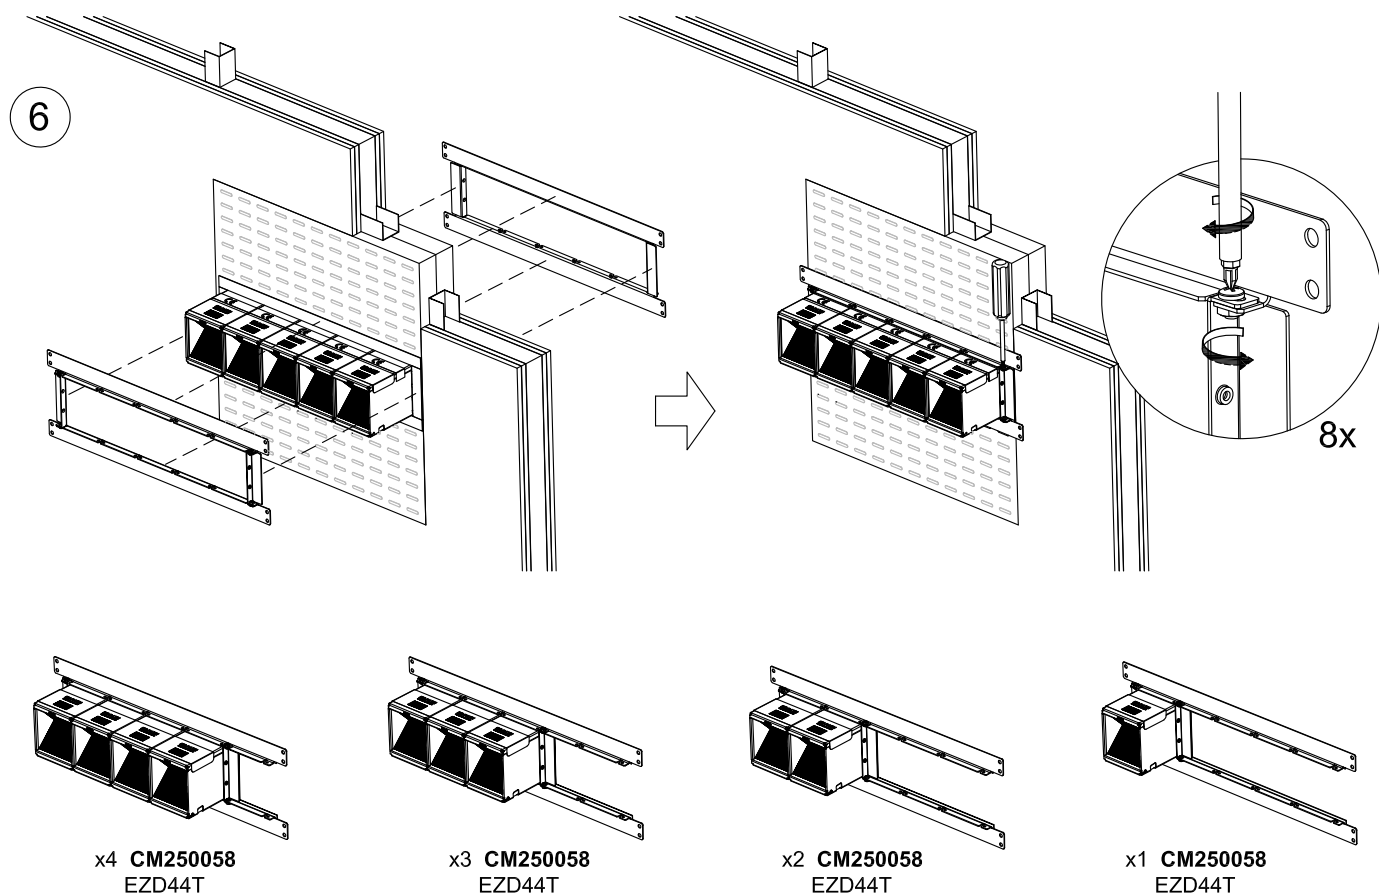

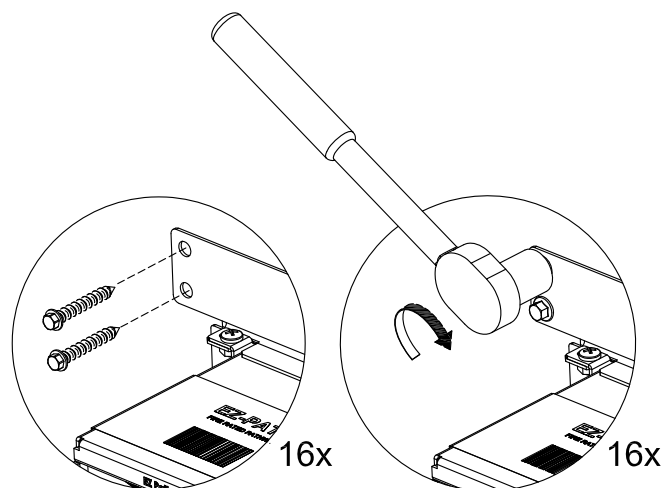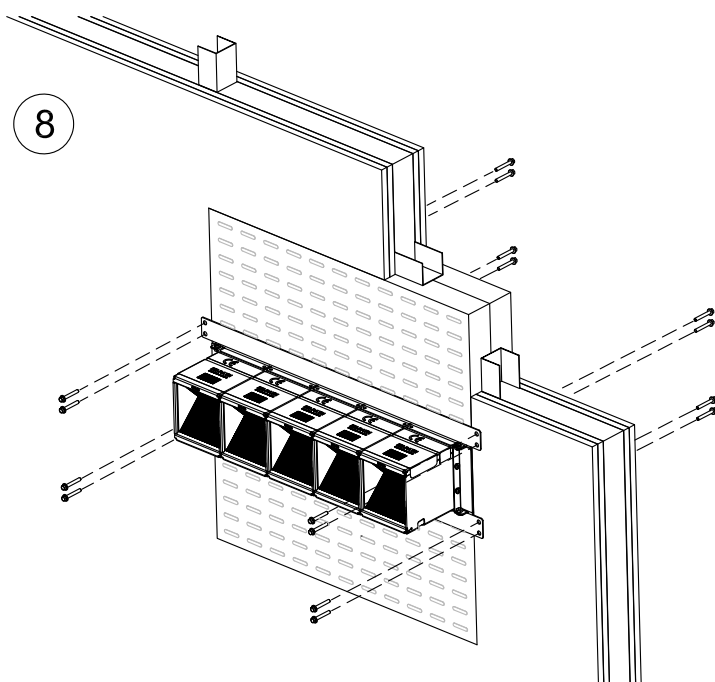

Flexible wall

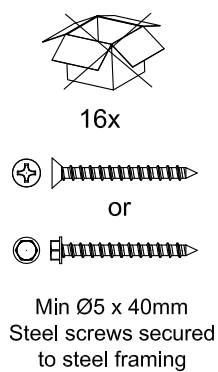

Rigid wall

