



**CM350704**  
**EZP544MBE**

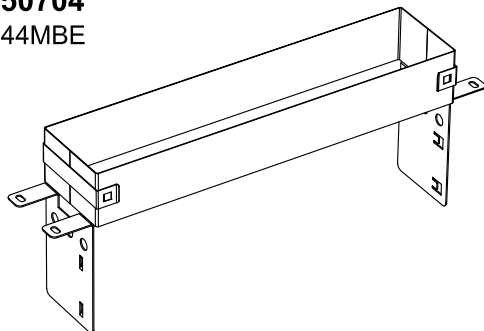

Please refer to CM350704 Application Sheet and Installation Sheet

**CM250058**

**EZD44T**  
**2 to 5x**

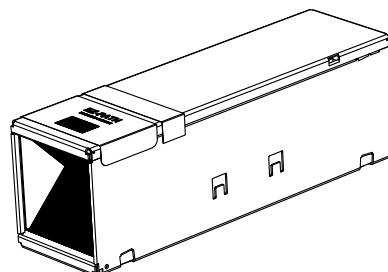


To be ordered separately

**CM350704 + CM250058**  
**EZP544MBE + EZD44T**

+

Mortar

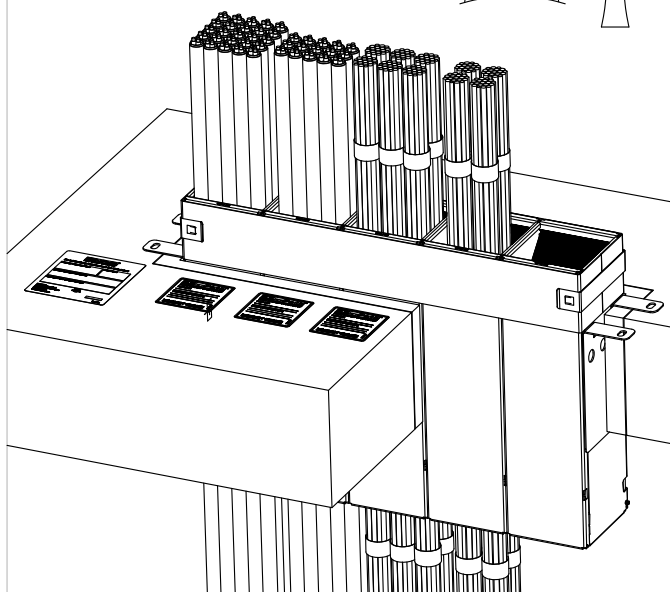

**Ordering information**



CM350704



0.80



1

**Applications**

For all types of cables up to Ø21mm OD  
 Rigid floors

**Performance**

Fire resistance : EN1366-3  
 Classification : EN13501-2

**Firestop handling**


No handling required for the fire safety compliance

**Dimensions**


Bracket width : 57 mm

**Opening dimensions**


542 x 144 mm  
 (+/- 8mm)



440 x 144 mm  
 (+/- 8mm)



330 x 144 mm  
 (+/- 8mm)



216 x 144 mm  
 (+/- 8mm)

