
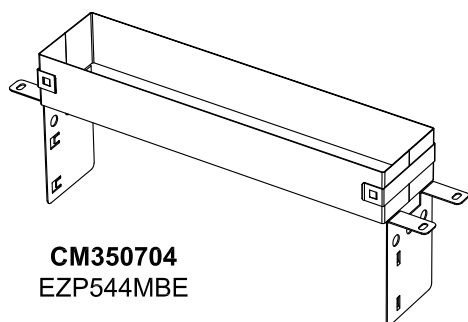


Rigid floors

Minimum floor thickness	≥ 150 mm
Ø cable	OD ≤ Ø 21 mm
Cable loading	0% to 100%
Opening size	Page 2/2
Performance	EI 120
Fire resistance	EN 1366-3
Classification	EN 13501-2

Not at scale. Units in millimeters





Please refer to the CM350704 Installation Sheet

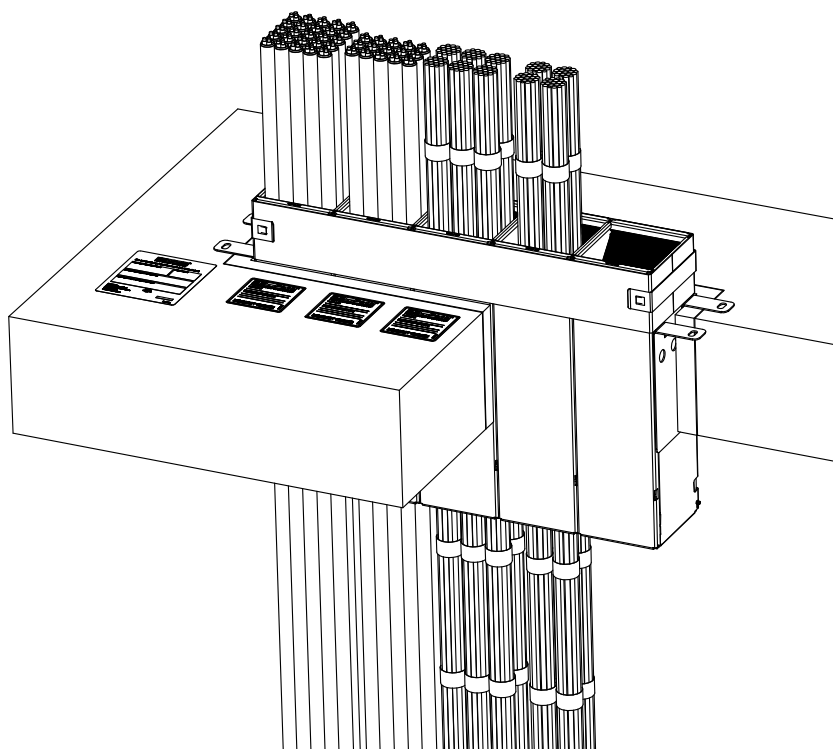


CM350704
EZP544MBE

+


CM250058
EZD44T
2x up to 5x

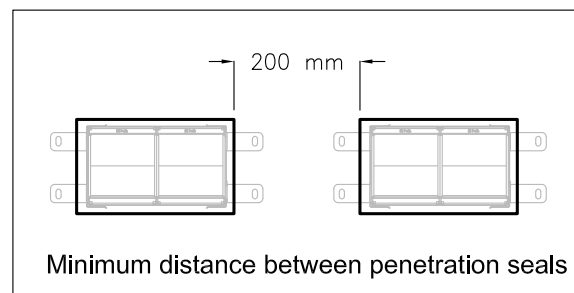


CM350704
+ 2x CM250058



CM350704
+ 3x CM250058



CM350704
+ 4x CM250058

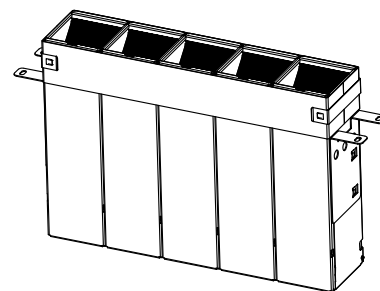

CM350704
+ 5x CM250058

