



Ordering information




EZD44ES

1.1

1





Extension to be attached to the top and bottom flanges.




Upper hook

Lower hook

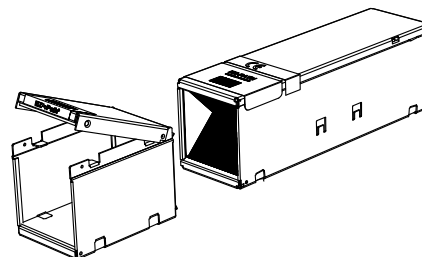

+



CM250178
EZD44ES

CM250058
EZD44T




Wall plate kits


CM350701 / EZP144RSE	X = min 50mm
CM350700 / EZP144WE	X = min 50mm
CM250230 / EZP144WT	X = min 70mm
CM350702 / EZP544WE	X = min 50mm
CM250250 / EZP544WT	X = min 70mm

X = minimum length to accommodate for the plate and the insulation gasket


216 mm ≤ Wall thickness ≤ 368 mm




520 mm ≤ Wall thickness ≤ 672 mm

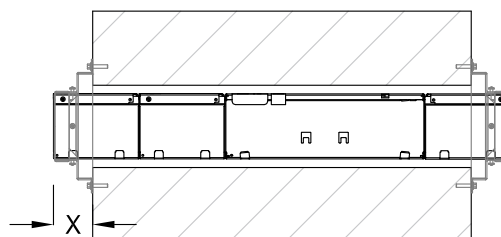

368 mm ≤ Wall thickness ≤ 520 mm

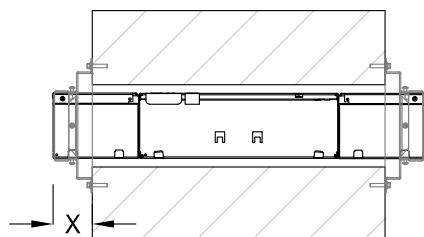

672 mm ≤ Wall thickness ≤ 824 mm

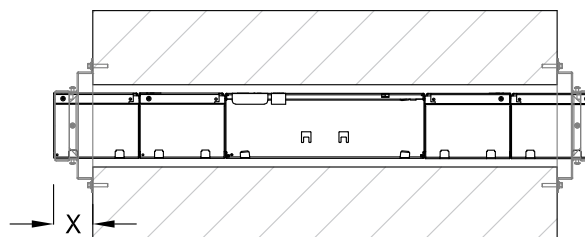

Optional, EZD44ES extension can be used for floor application