


Rigid Floor

Floor thickness	≥ 150 mm
Ø cable	OD ≤ Ø 80 mm
Cable loading	0% to 100%
Opening size	Ø 152 mm - Ø 155 mm
Performance	EI 120 : OD ≤ Ø 50 mm cables
	EI 90 : OD ≤ Ø 80 mm cables
Fire resistance	EN 1366-3
Certification	ETA - 13/0993


Not at scale. Units in millimeters

Please refer to the CM250260 Installation Sheet

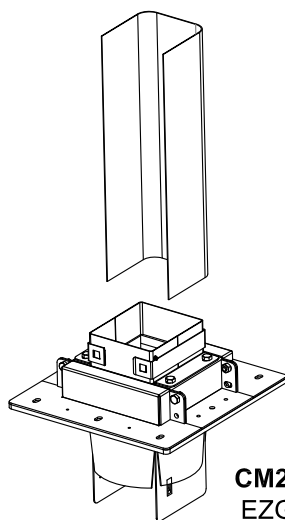

CM250260
EZG144T

+



CM250058
EZD44T

