



CM250370
EZG444T

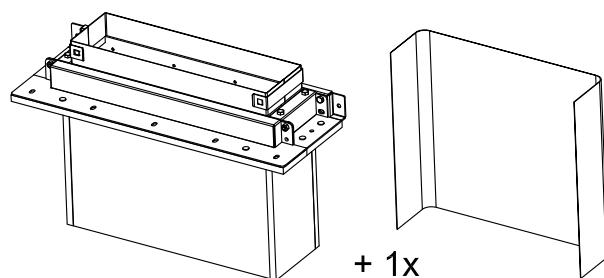


Please refer to CM250370 Application Sheet and Installation Sheet

CM250058
EZD44T
4x

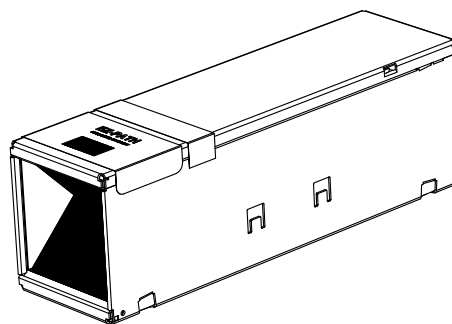

To be ordered separately

CM250370 + CM250058
EZG444T + EZD44T

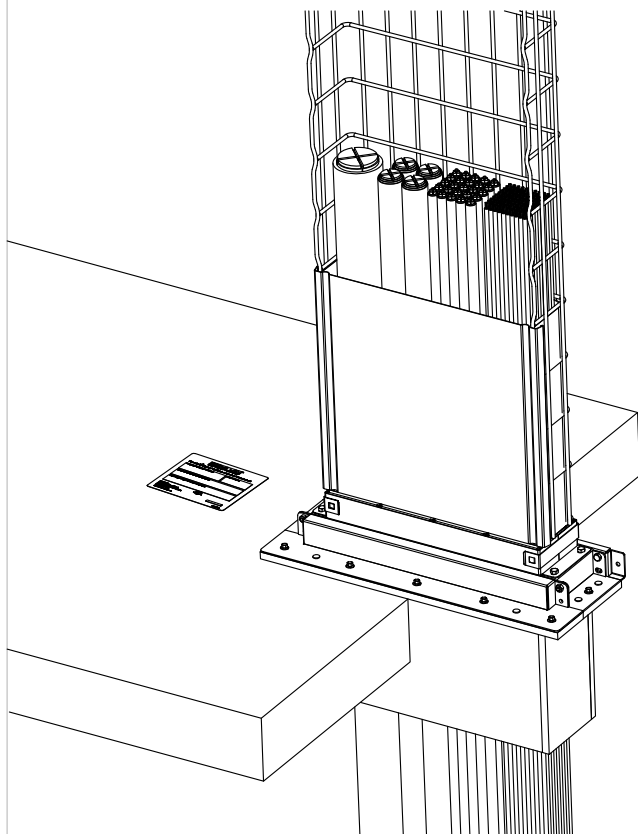

Ordering information



CM250370



9.07



1

Applications

For all types of cables up to Ø80mm OD
 Rigid floors

Performance

Fire resistance : EN1366-3
 Classification : EN13501-2
 European Technical Assessment ETA – 13/0993

Firestop handling

No handling required for the fire safety compliance

Dimensions

Plate dimensions : 568 x 210 mm
 Opening dimensions : 445 x 155 mm