
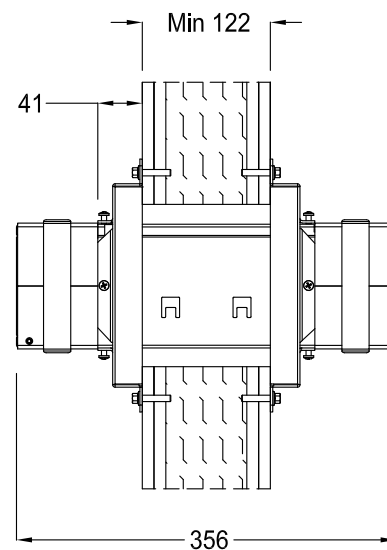
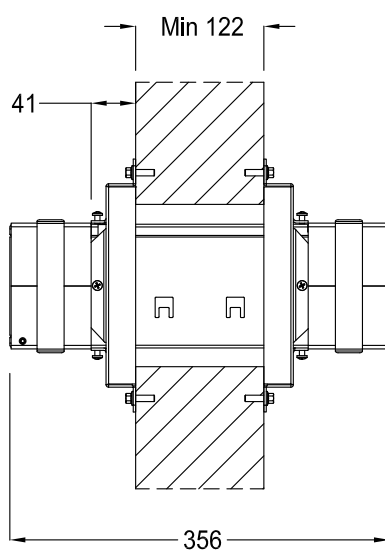
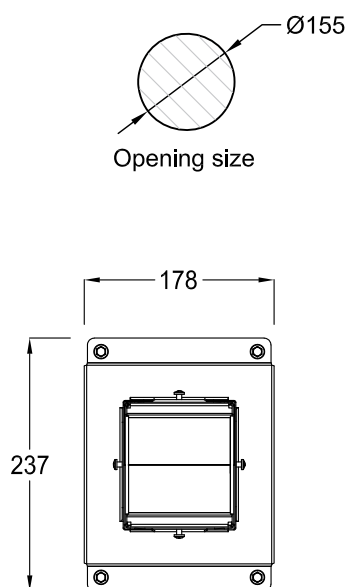
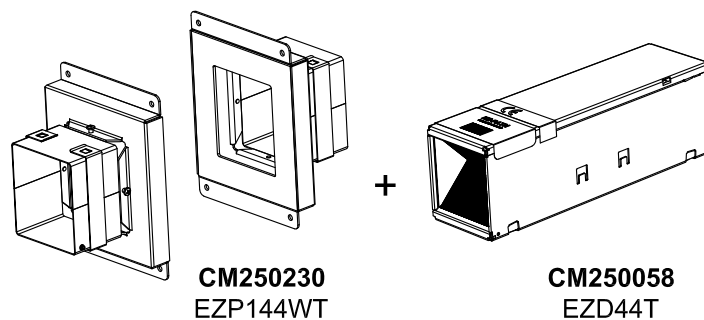
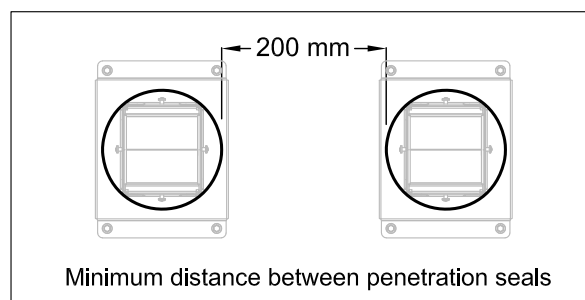


Rigid walls and flexible walls

Wall thickness	≥ 122 mm
Ø cables	$OD \leq \varnothing 21$ mm
Cable loading	0% to 100%
Opening size	$\varnothing 152$ mm - $\varnothing 155$ mm
Performance	EI 120
Fire resistance	EN 1366-3
Certification	ETA - 13/0993


Not at scale. Units in millimeters

Please refer to the CM250230 Installation Sheet

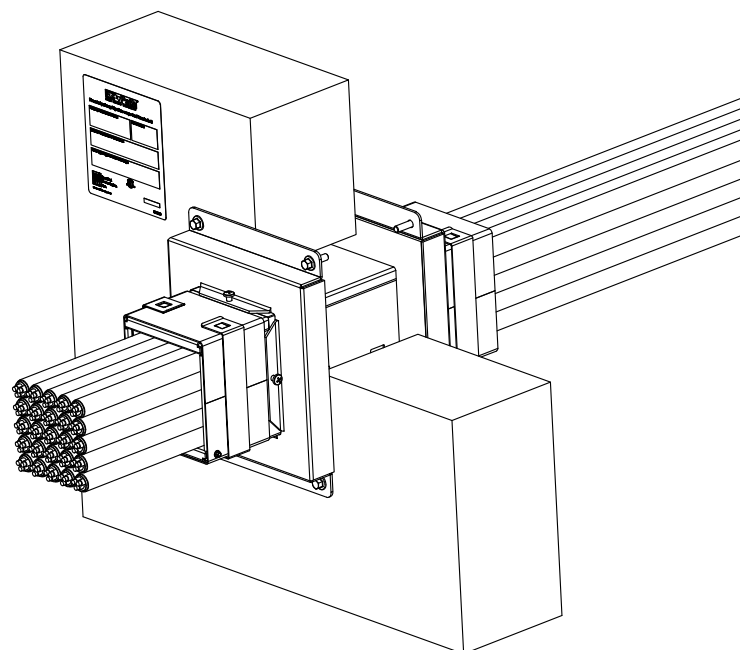

Rigid walls and flexible walls

Wall thickness	≥ 122 mm
Ø cables	$OD \leq \varnothing 80$ mm
Cable loading	0% to 100%
Opening size	$\varnothing 152$ mm - $\varnothing 155$ mm
Performance	EI 120
Fire resistance	EN 1366-3
Certification	ETA - 13/0993

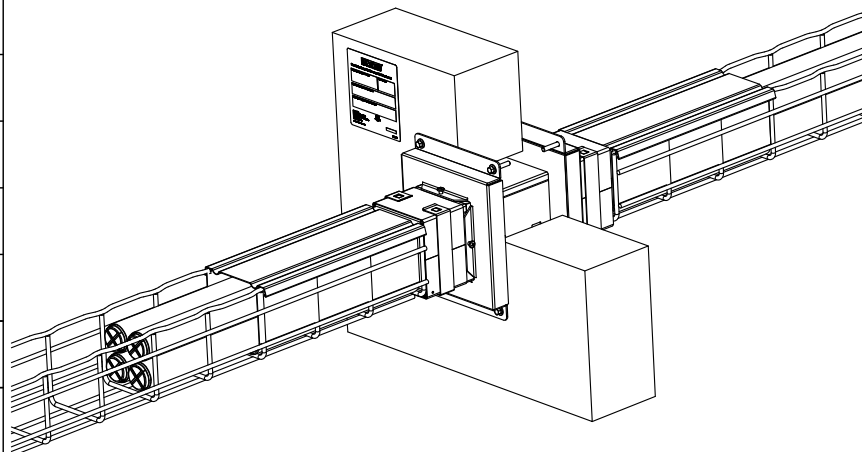

Not at scale. Units in millimeters

Please refer to the CM250230 Installation Sheet

