
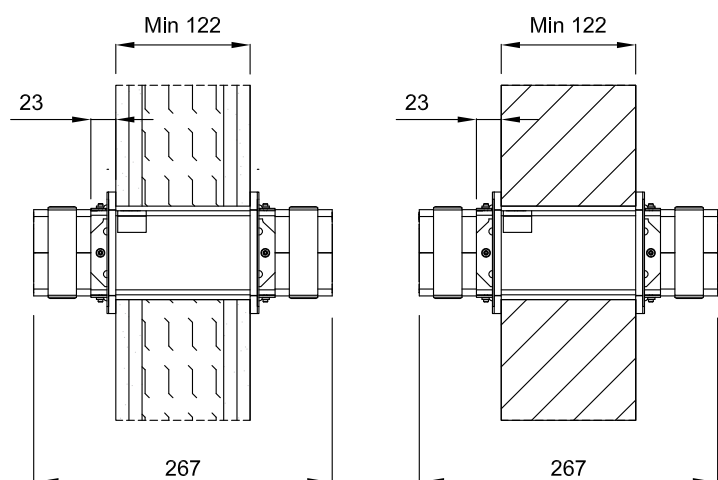



Flexible and rigid walls

Wall thickness	$\geq 122\text{mm}$
Ø cable	$\text{OD} \leq \text{Ø } 21\text{ mm}$
Cable loading	0% to 100%
Performance	EI 120
Fire resistance	EN 1366-3
Certification	ETA - 13/0993
Minimum distance between penetration seals	200 mm


Not at scale. Units in millimeters
Please refer to the Installation Sheet

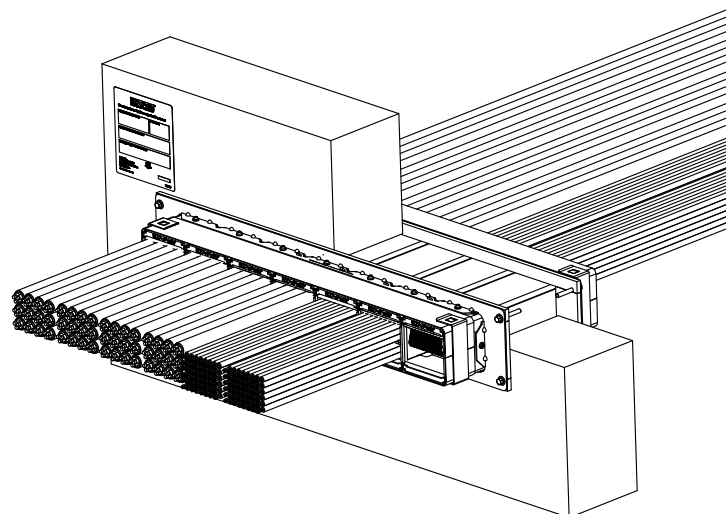


CM250170 + CM250018 (7x)
EZP733WT + EZD33T (7x)

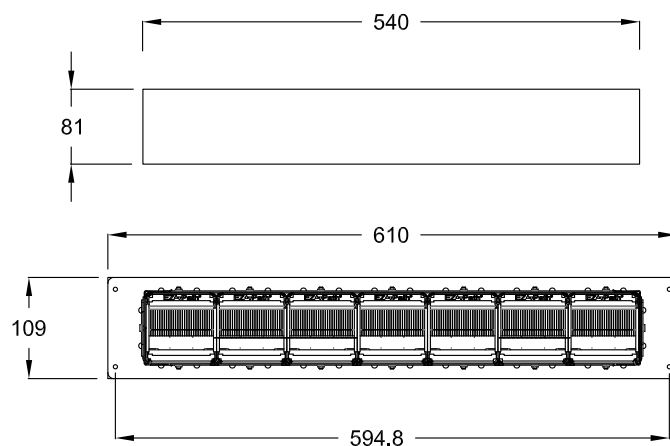


CM250120 + CM250018 (2x)
EZP233WT + EZD33T (2x)

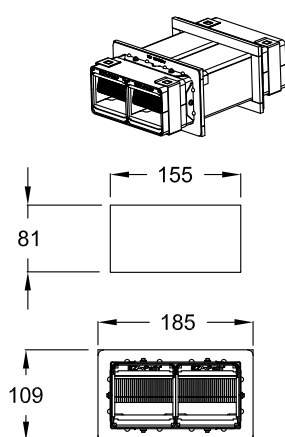

CM250130 + CM250018 (3x)
EZP333WT + EZD33T (3x)

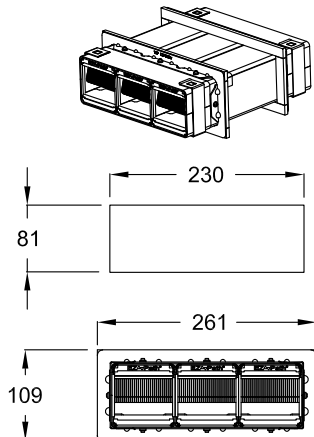



CM250140 + CM250018 (4x)
EZP433WT + EZD33T (4x)

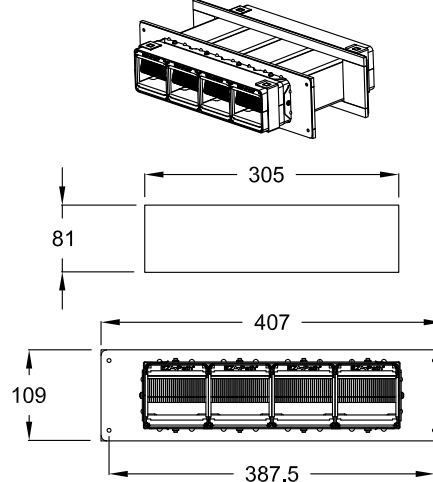


Rigid walls

Wall thickness	$\geq 150\text{mm}$
Ø cable	$\text{OD} \leq \text{Ø } 50\text{ mm}$
Cable loading	0% to 100%
Performance	EI 120 for cables $\text{OD} \leq \text{Ø } 21\text{ mm}$
	EI 60 for cables $\text{OD} \leq \text{Ø } 50\text{ mm}$
Fire resistance	EN 1366-3
Certification	ETA - 13/0993
Minimum distance between penetration seals	200 mm


Not at scale. Units in millimeters
Please refer to the Installation Sheet

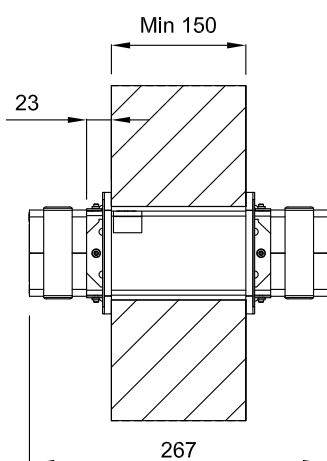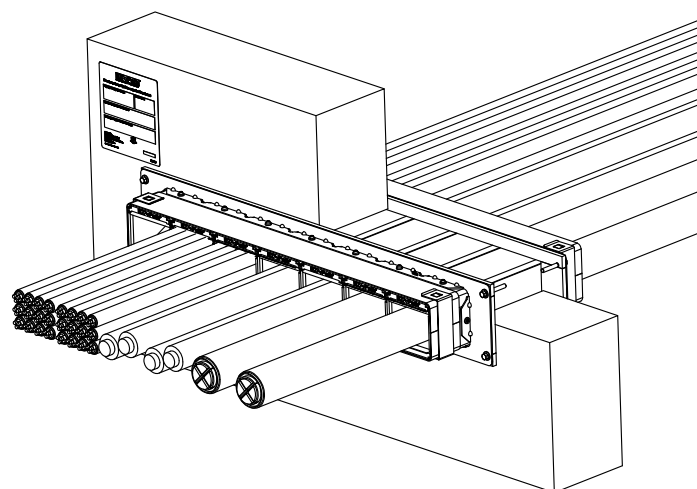


CM250170 + CM250018 (7x)
EZF733WT + EZD33T (7x)

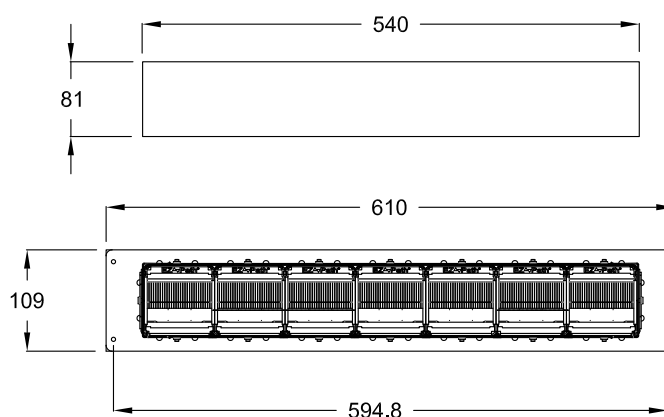

CM250120 + CM250018 (2x)
EZF233WT + EZD33T (2x)

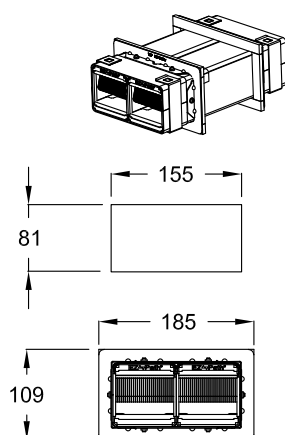

CM250130 + CM250018 (3x)
EZF333WT + EZD33T (3x)

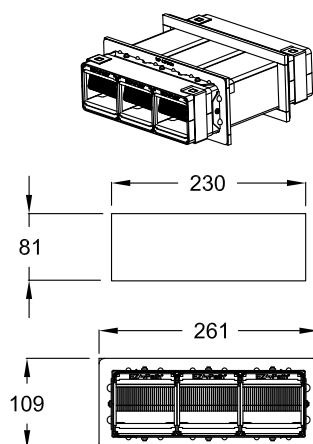

CM250140 + CM250018 (4x)
EZF433WT + EZD33T (4x)

