



CM250250
EZP544WT

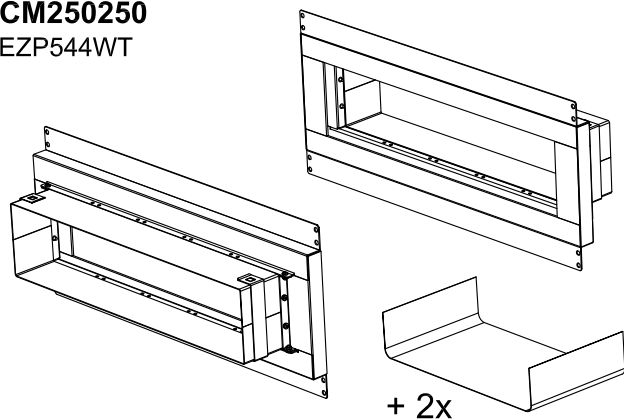



Please refer to CM250250 Application Sheet and Installation Sheet

CM250058
EZD44T
 1 to 5x

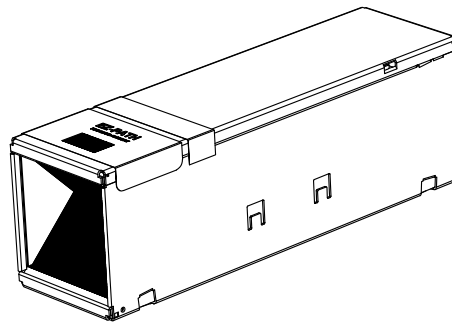

To be ordered separately

CM250250 + CM250058
EZP544WT + EZD44T

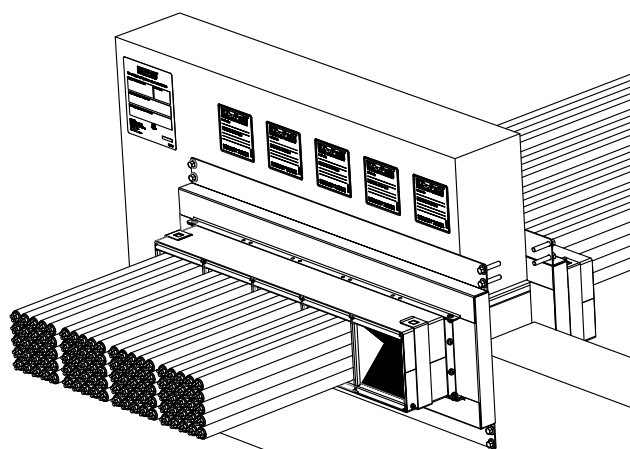

16x (Not included)

Ordering information



CM250250



5.76



1

Applications

For all types of cables up to Ø80mm OD
 Flexible walls and rigid walls

Performance

Fire resistance : EN1366-3
 Classification : EN13501-2
 European Technical Assessment ETA – 13/0993

Firestop handling

No handling required for the fire safety compliance

Dimensions

Plate dimensions : 610 x 272 mm

Opening dimensions

515 x 120 mm

412 x 120 mm

309 x 120 mm

206 x 120 mm

110 x 120 mm

