
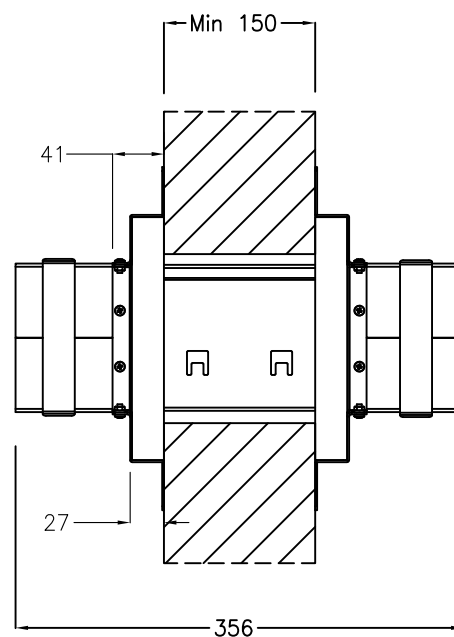
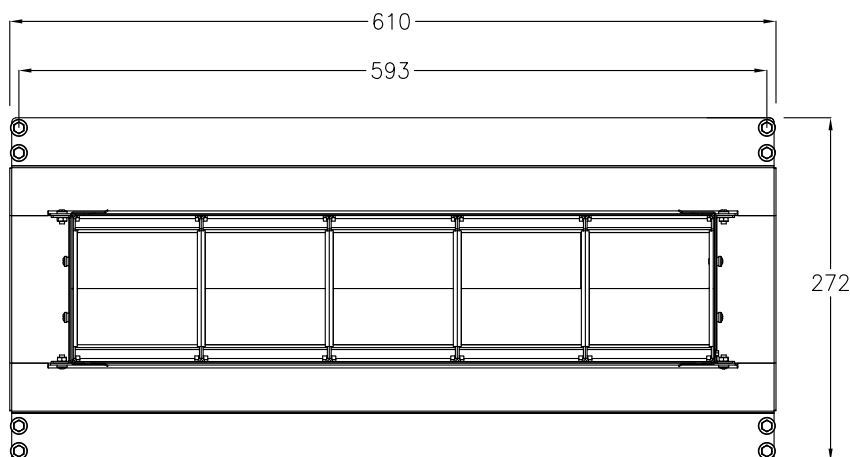
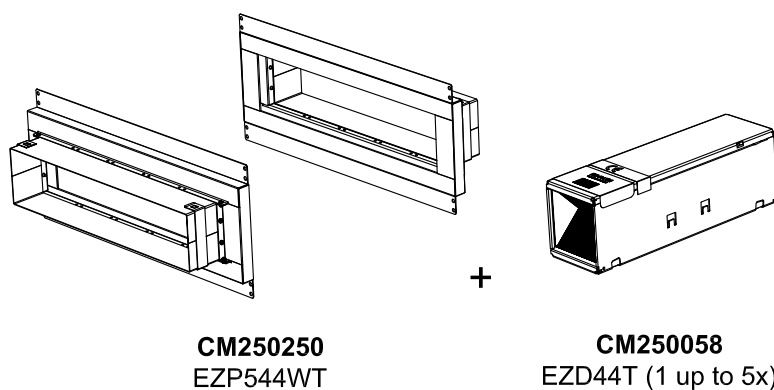
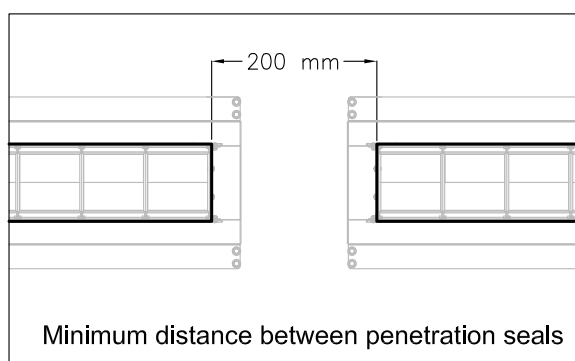


Rigid walls

Wall thickness	≥ 150 mm
Ø cables	$OD \leq \varnothing 21$ mm
Cable loading	Empty to 100%
Performance	EI 120
Fire resistance	EN 1366-3
Certification	ETA - 13/0993


Not at scale. Units in millimeters

Please refer to the CM250250 Installation Sheet

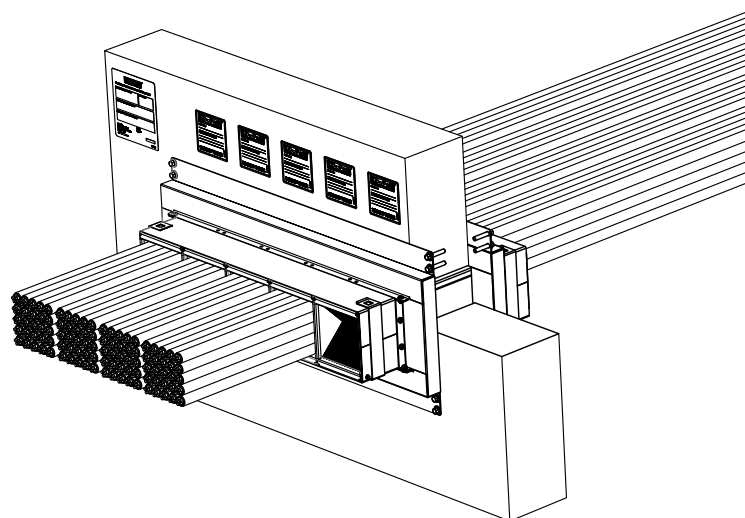



Rigid walls and flexible walls

Wall thickness	≥ 122 mm
Ø cables	$OD \leq \varnothing 80$ mm
Cable loading	Empty to 100%
Performance	EI 120
Fire resistance	EN 1366-3
Certification	ETA - 13/0993

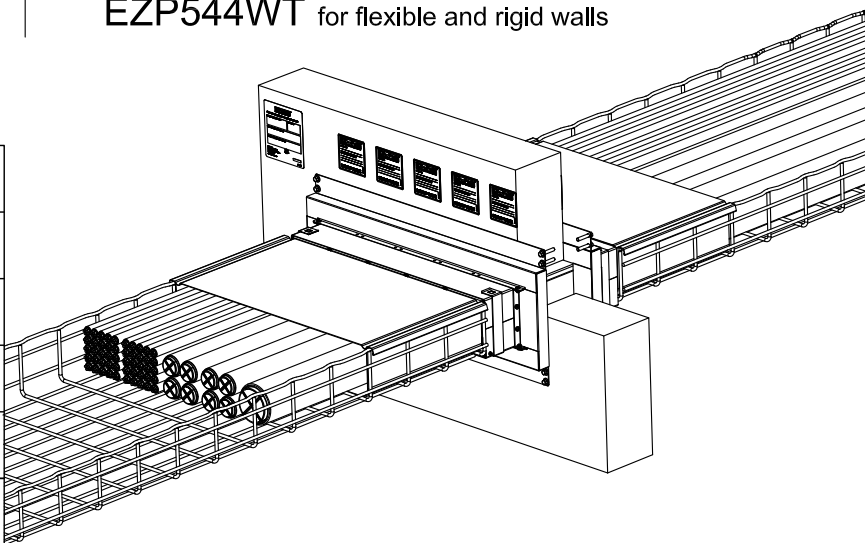

Not at scale. Units in millimeters


Please refer to the CM250250 Installation Sheet

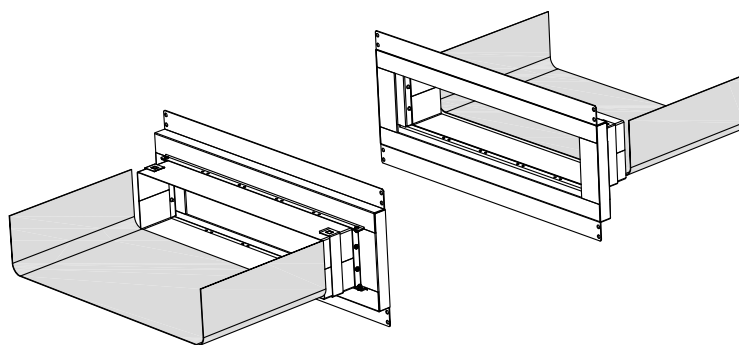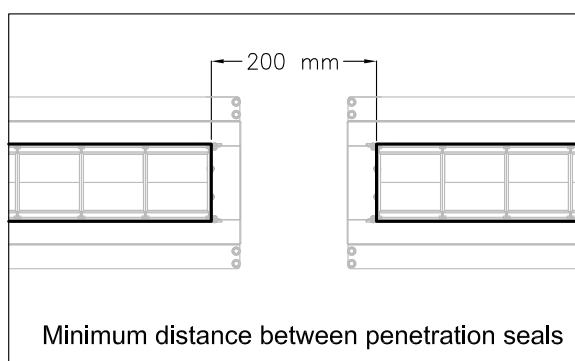
















CM250250
EZP544WT

+


CM250058
EZD44T (1 up to 5x)

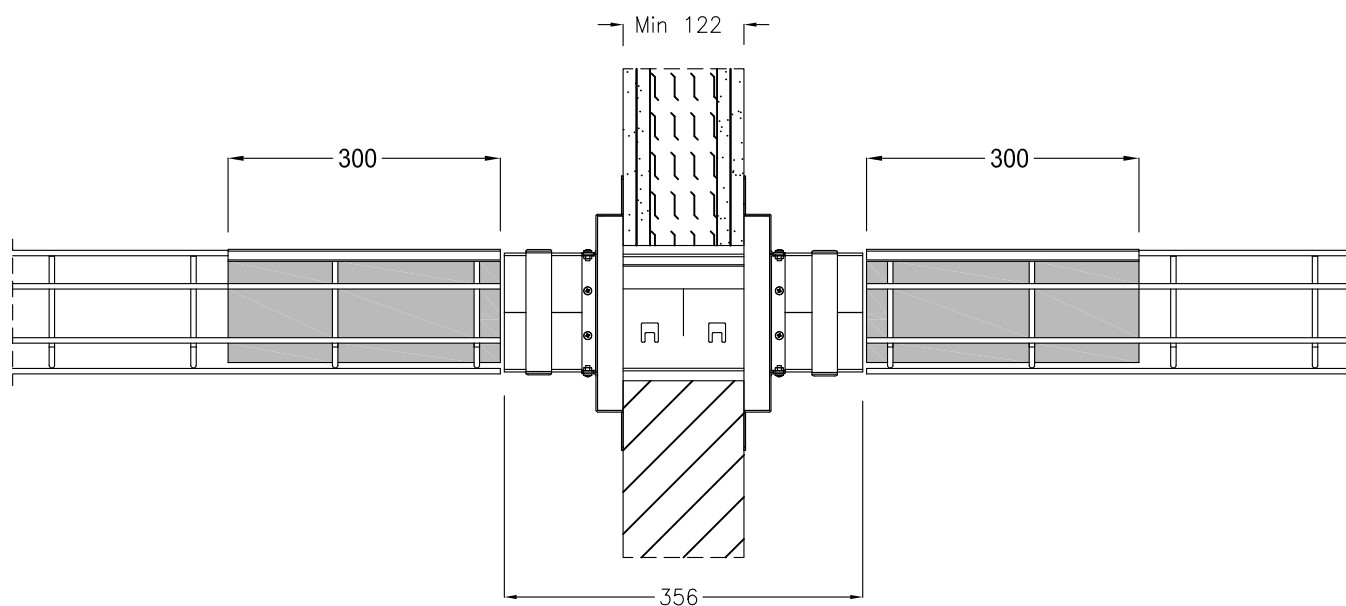





Opening dimensions

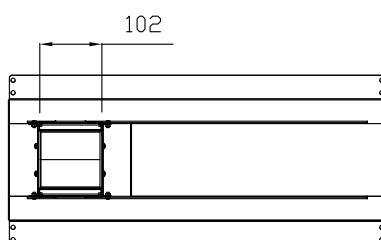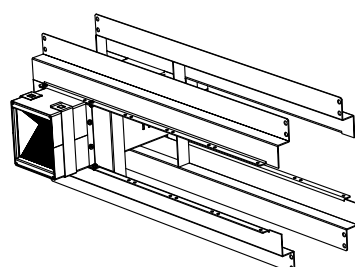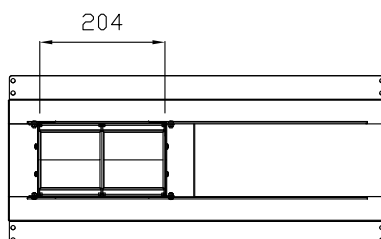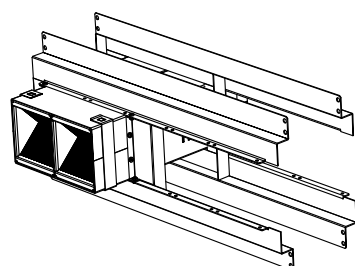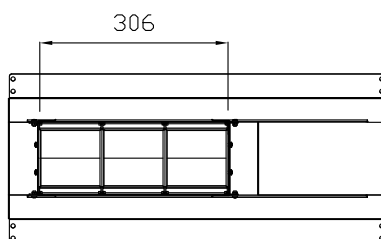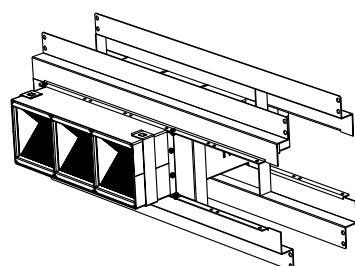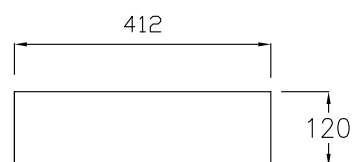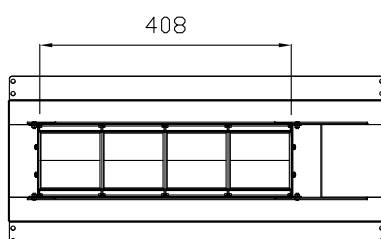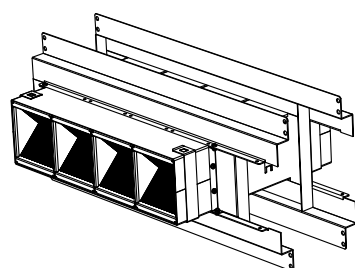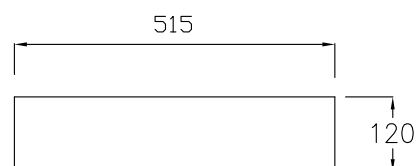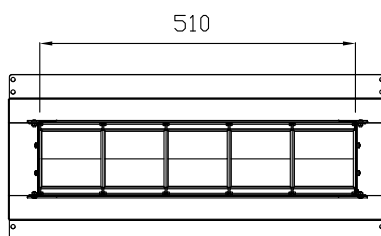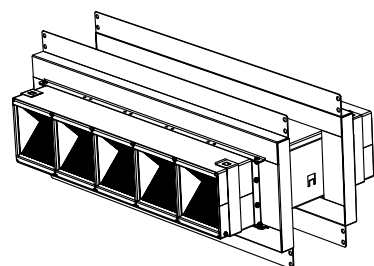

Not at scale. Units in millimeters
Please refer to the CM250250 Installation Sheet

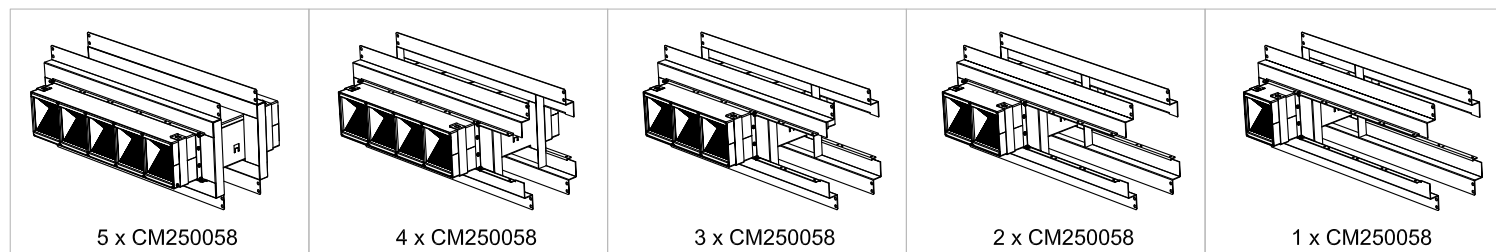


Framing construction in flexible wall

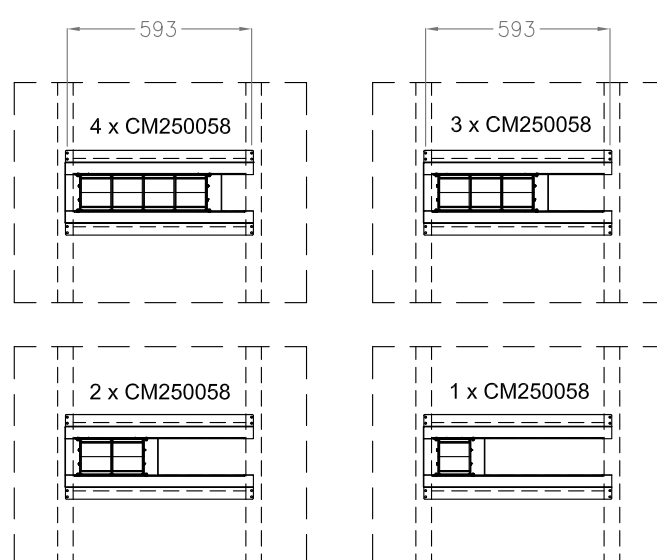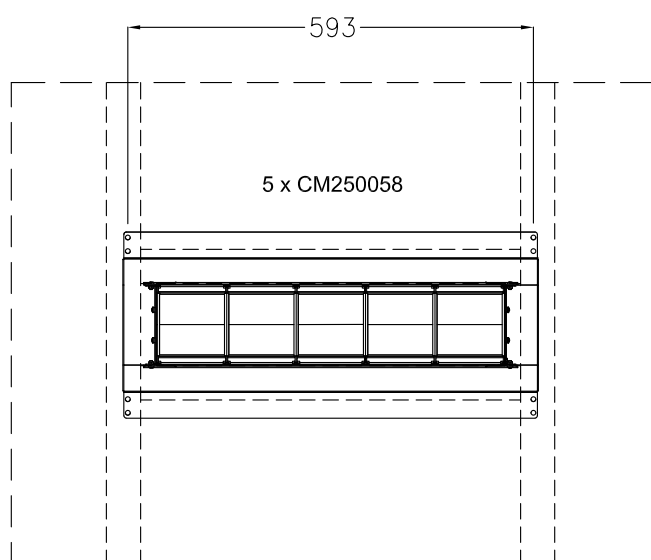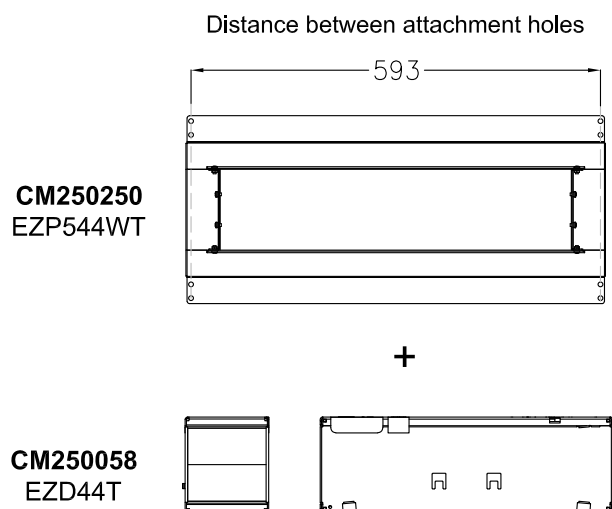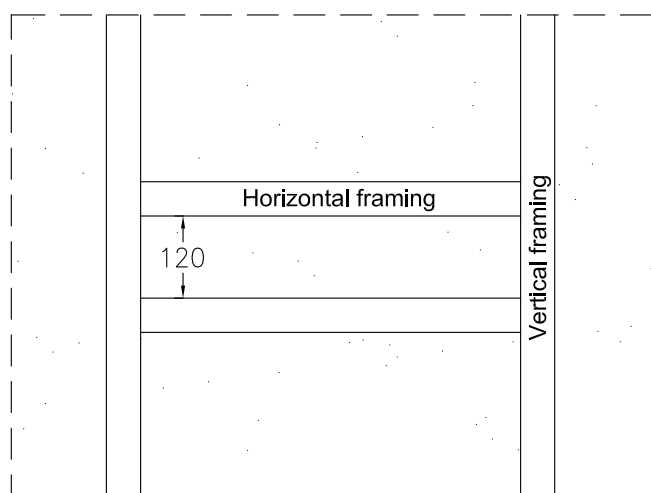


Not at scale. Units in millimeters
Please refer to the CM250250 Installation Sheet


Dimensions and location of the opening




a	b	c
48	515	48




a	b	c
48	309	252




a	b	c
48	206	355




a	b	c
48	110	452




a	b	c
48	412	150




a	b	c
150	309	150




a	b	c
150	206	252




a	b	c
150	110	350




a	b	c
150	412	48




a	b	c
252	309	48




a	b	c
252	206	150




a	b	c
250	110	250




a	b	c
355	206	48



a	b	c
350	110	150



a	b	c
452	110	48

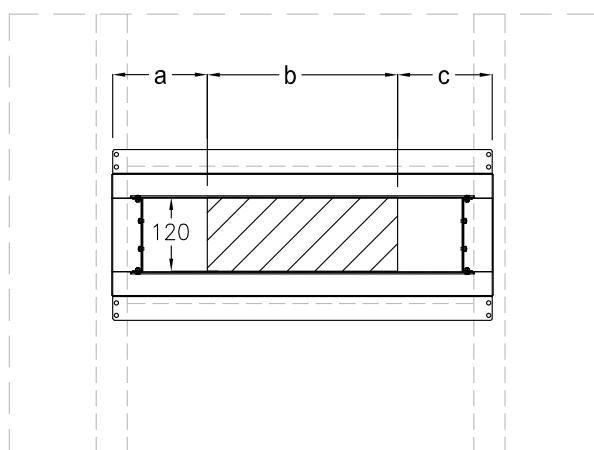

a = position of the opening from the left side of the CM250250 plate
 b = opening width
 c = position of the opening from the right side of the CM250250 plate
 120 mm = opening height
 Tolerance a / b / c = +/- 3mm