

Certifications

Fire Resistance : EN 1366-3

Classification : EN 13501-2

EZ-PATH Systems		Ø Cables (mm)	Flexible wall		Rigid wall			Rigid Floor
			≥100mm	≥122mm	≥100mm	≥122mm	≥150mm	≥150mm
A	1 x CM250058 (grouted)* 1 x EZD44T (grouted) *	OD ≤ Ø 21	-	-	EI 90	EI 90	EI120 / E240	-
B	2 up to 5 x CM250058 (grouted) * 2 up to 5 x EZD44T (grouted) *	OD ≤ Ø 21	-	-	EI90 / E240	EI90 / E240	EI90 / E240	-
C	1 x CM250058 + CM350700 * 1 x EZD44T + EZP144WE *	OD ≤ Ø 21	EI90 / E120	EI90 / E120	EI90 / E120	EI90 / E120	EI 120 **	-
D	1 x CM250058 + CM350701 * 1 x EZD44T + EZP144RSE *	OD ≤ Ø 21	EI90 / E120	EI90 / E120	EI90 / E120	EI90 / E120	EI90 / E120	-
E	1 x CM250058 + CM250230 1 x EZD44T + EZP144WT	OD ≤ Ø 80	-	EI 120	-	EI 120	EI 120	-
F1	1 up to 5 x CM250058 + CM350702 * 1 up to 5 x EZD44T + EZP544WE *	OD ≤ Ø 21	EI 120	EI 120	EI 120	EI 120	EI 120	-
F2	1 up to 5 x CM250058 + CM350702 * 1 up to 5 x EZD44T + EZP544WE * Rockwool FirePro® Ablative Coated Batt	OD ≤ Ø 21	EI90 / E120	EI90 / E120	EI90 / E120	EI90 / E120	EI90 / E120	-
G	1 up to 5 x CM250058 + CM250250 1 up to 5 x EZD44T + EZP544WT	OD ≤ Ø 80	-	EI 120	-	EI 120	EI 120	-
H	1 x CM250058 + CM350703 * 1 x EZD44T + EZP144MBE *	OD ≤ Ø 21	-	-	-	-	-	EI 120
I	1 x CM250058 + CM250260 1 x EZD44T + EZG144T	OD ≤ Ø 50	-	-	-	-	-	EI 120
		OD ≤ Ø 80	-	-	-	-	-	EI 90
J1	2 up to 5 x CM250058 + CM350704 * 2 up to 5 x EZD44T + EZP544MBE *	OD ≤ Ø 21	-	-	-	-	-	EI 120
J2	1 up to 5 x CM250058 + CM350704 * 1 up to 5 x EZD44T + EZP544MBE * Rockwool FirePro® Ablative Coated Batt and Firepro® Compound	OD ≤ Ø 21	-	-	-	-	-	EI 120
K	4 x CM250058 + CM250370 4 x EZD44T + EZG444T	OD ≤ Ø 80	-	-	-	-	-	EI 120
L	8 x CM250058 + CM250380 8 x EZD44T + EZG844T	OD ≤ Ø 80	-	-	-	-	-	EI 120

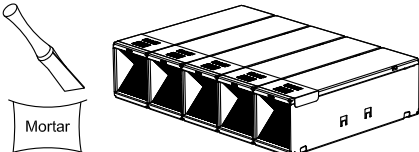







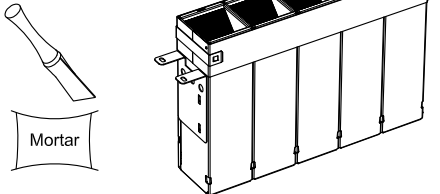

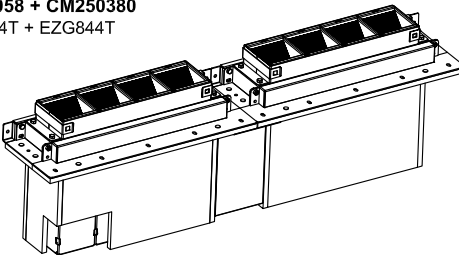
All EZ-Path systems are approved empty up to 100% fill of cables

Please refer to the corresponding Application Data Sheet and Installation Sheet for more additional information about the installation method

* Pending CE-Marking certification. These systems are classified per the EN13501-2

** CM350700 : EI120 for telecommunication cables in ≥ 150mm rigid wall
EI90 / EI120 for all types of ≤ Ø 21mm cables in ≥ 100mm flexible and rigid wall

EZ-Path® is a registered trademark and is manufactured by Specified Technologies Inc. (STI)

A + B Grouted EZD44T 	C CM250058 + CM350700 EZD44T + EZP144WE 	D CM250058 + CM350701 EZD44T + EZP144RSE 
E CM250058 + CM250230 EZD44T + EZP144WT 	F1 CM250058 + CM350702 EZD44T + EZP544WE  F2 used in association with Rockwool FirePro® Ablative Coated Batt	G CM250058 + CM250250 EZD44T + EZP544WT 
H CM250058 + CM350703 EZD44T + EZP144MBE 	I CM250058 + CM250260 EZD44T + EZG144T 	J1 CM250058 + CM350704 EZD44T + EZP544MBE  J2 Used in association with Rockwool FirePro® Ablative Coated Batt and Firepro® Compound
K CM250058 + CM250370 EZD44T + EZG444T 	L CM250058 + CM250380 EZD44T + EZG844T 	

All EZ-Path systems are approved empty up to 100% fill of cables

Please refer to the corresponding Application Sheet and Installation Sheet for more information about the installation method

EZ-Path® is a registered trademark and is manufactured by Specified Technologies Inc. (STI)