


Cat.6 U/UTP LSZH cable for local networks

Catalogue number(s) : 0 328 86

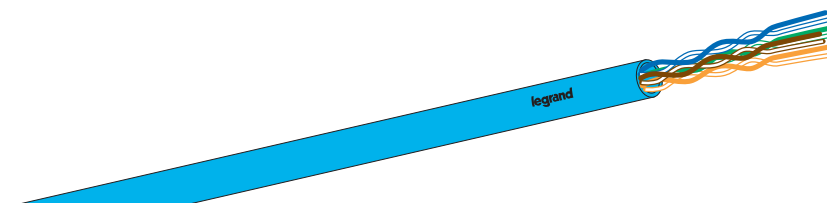


1. USE

Cable for high-speed VDI transmission networks

802.3 bt PoE++ applications compatible according to installation standards ISO/IEC 14763-2 (final draft) and EN 50174-2 : 2018

2. DESCRIPTION

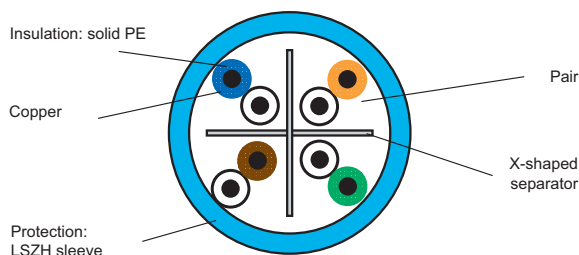

3. MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- EUROCLASS
- Velocity of propagation
- Traceability
- Measurement (length in meters).

Complementary marking (on label)

- Designation
- Made in....

4. PERFORMANCE AT 250 MHZ (STAND. ANSI/TIA 568.2-D)

Reference	0 328 86
Maximum attenuation (dB/100 m)	33
Minimum NEXT (dB)	38
PS NEXT (dB)	36
ACRF (dB / 100 m)	20
PS ACRF (dB / 100 m)	17
Return Loss (dB)	17,3

5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0 328 86
Type	U/UTP
Type of sleeve	LSZH
Number of pairs	4
Assembly	Pairs
Diameter over insulation (mm)	1
Cable diameter (mm)	5,9±0,3
Weight of cable (kg/km)	44
Min. bending radius when laying (mm)	48
AWG gauge*	23

* According to UL 444 ed.3 table 4

6. ELECTRICAL FEATURES AT 20°C

Catalogue number	0 328 86
Type	U/UTP
Maximum linear resistance (ohm/km)	80*
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	67 %
Characteristic impedance at 100 MHz	100 ±5Ω

* According to standard IEC 61156-5

7. ORDERING INFORMATION

Catalogue number	0 328 86
Type	U/UTP
Colour	Blue RAL 5015
Pack (m)	305
Packaging	Box

8. ENVIRONMENTAL FEATURES

Transport and storage temperature : 0 at + 50 °C
 Storage temperature before use : 10°C during 24h (if stock ≤ 5°C)
 Usage temperature: – 20 to + 60 °C

Fire rating : EN 50399, IEC 60332-1-2, EN 60332-1-2
 Smoke density : IEC 61034-2, EN 61034-2
 Toxicity of fire effluent : IEC 60754-2, EN 60754-2

EUROCLASS EN 13501-6 = Class Cca - s1a, d1, a1
 Also compliant with Eca and Dca

9. STANDARDS AND APPROVALS

Cat 6, 250 MHz
 Electrical performances and characteristics :
 - ANSI/TIA 568.2-D
 - EN 50173-1
 - EN 50288-6-1
 - ISO/IEC 11801 (ed. 2.2)
 - IEC 61156-5
 IEEE 802.3bt : PoE++