



# SFERA CLASSIC

## 4-pushbutton module

342240

### Description

2 WIRE pushbutton module with 4 call pushbuttons. The connections to the system are made using the multi-cable supplied; also, the nameplates are illuminated by 12 green LED. To be used with speaker modules, items 342150 and 342170, and with modular front covers and pushbutton monobloc.

**The device must not be configured.**

### Related items



332231 (front cover with 3 keys - Allmetal)  
 332232 (front cover with 3 keys - White)  
 332233 (front cover with 3 keys - Alugray)  
 332241 (front cover with 4 keys - Allmetal)  
 332242 (front cover with 4 keys - White)  
 332243 (front cover with 4 keys - Alugray)

For the use of monobloc front covers refer to the catalogue.

### Technical data

Power supply from SCS BUS: 18 – 27 Vdc  
 Stand by absorption: 15 mA  
 Max. operating absorption: 15 mA  
 Operating temperature: (-25) – (+70) °C

### Dimensional data

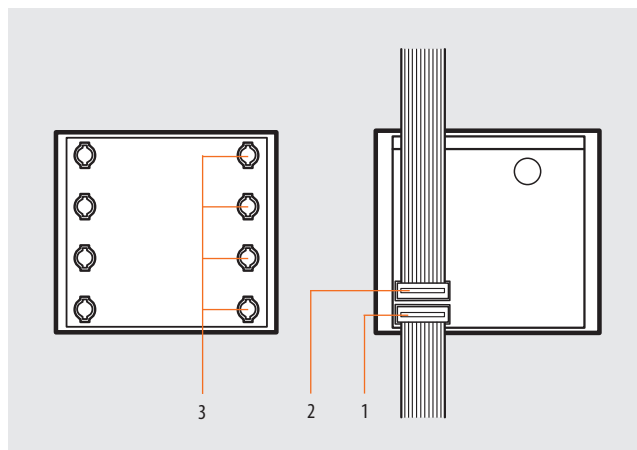

### Legend

- 1** - Connector socket for output connection with other modules and for the last pushbutton module, housing for the electronic card supplied as standard with the speaker module.
- 2** - Input socket for connection with other modules.
- 3** - Call pushbuttons.