

EZ-PATH® Fire Rated Pathway Series 33

All types of cables



FIRE RESISTANCE CLASSIFICATION

EZ-PATH Systems			Flexible wall		Rigid wall			Rigid Floor
			≥100mm	≥122mm	≥100mm	≥122mm	≥150mm	≥150mm
Device(s)	Plate kit	Ø Cables (mm)						
1 or 2 x EZD33T (grouted)	-	OD ≤ Ø 21	-	-	-	-	EI90 / EI120	-
1 x EZD33T	EZP133CWT	OD ≤ Ø 21	EI60 / EI120	EI120	EI60 / EI120	EI120	EI120 *	-
		OD ≤ Ø 50	-	-	-	-	EI60 / EI120 *	-
2 x EZD33T	EZP233WT	OD ≤ Ø 21	-	EI120	-	EI120	EI120 *	-
		OD ≤ Ø 50	-	-	-	-	EI60 / EI120 *	-
3 x EZD33T	EZP333WT	OD ≤ Ø 21	-	EI120	-	EI120	EI120 *	-
		OD ≤ Ø 50	-	-	-	-	EI60 / EI120 *	-
4 x EZD33T	EZP433WT	OD ≤ Ø 21	-	EI120	-	EI120	EI120 *	-
		OD ≤ Ø 50	-	-	-	-	EI60 / EI120 *	-
7 x EZD33T	EZP733WT **	OD ≤ Ø 21	-	EI120	-	EI120	EI120 *	-
		OD ≤ Ø 50	-	-	-	-	EI60 / EI120 *	-
1 x EZD33T	EZP133KT	OD ≤ Ø 21	-	-	-	-	-	EI120 / E240

Please refer to ETA 13/0887 and corresponding Application Sheets and Installation Sheets for additional information

* When opening is filled with construction mortar, integrity performance achieves E240


** EZP733WT plate kit not in stock. Please contact the STI representative for more information

ORDERING INFORMATION

EZ-Path Fire Rated Pathway Series 33


EZD33T

EZ-Path device
weight : 1.16 kg




EZD33E

Extension device
for thicker barrier
weight : 0.73 kg




EZP133CWT

Single wall plate
weight : 0.36 kg




EZP233WT

Two gang wall plate
weight : 0.45 kg




EZP333WT

Three gang wall plate
weight : 0.55 kg




EZP433WT

Four gang wall plate
weight : 0.88 kg




EZP733WT

Seven gang wall plate
weight : 1.49 kg



EZP133KT

Single floor plate
weight : 0.28 kg



EZ-PATH® Fire Rated Pathway Series 33

All types of cables




EZD33T (grouted)

Single or two
gang devices

Construction
mortar


Opening dimension

Single device	Ø102 mm
Two devices	170 x 90 mm

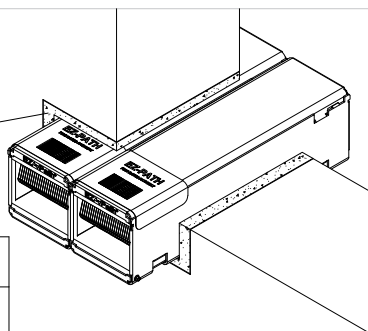

EZD33T + EZP133CWT


Single device



Opening dimension Ø102 mm

EZD33T + EZP233WT


Two gang devices



Opening dimension 155 x 81 mm

EZD33T + EZP333WT


Three gang devices

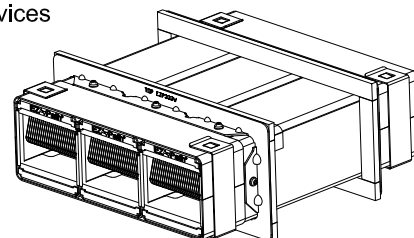

Opening dimension 230 x 81 mm

EZD33T + EZP433WT


Four gang devices

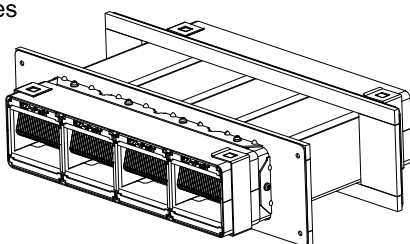

Opening dimension 305 x 81 mm

EZD33T + EZP733WT **

Seven gang devices

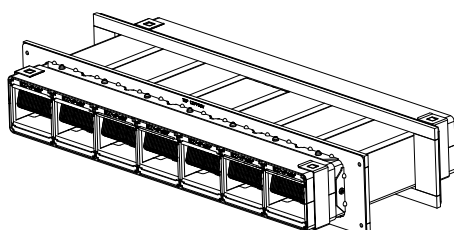


Opening dimension 540 x 81 mm

EZD33T + EZP133KT

Single device

Construction
mortar

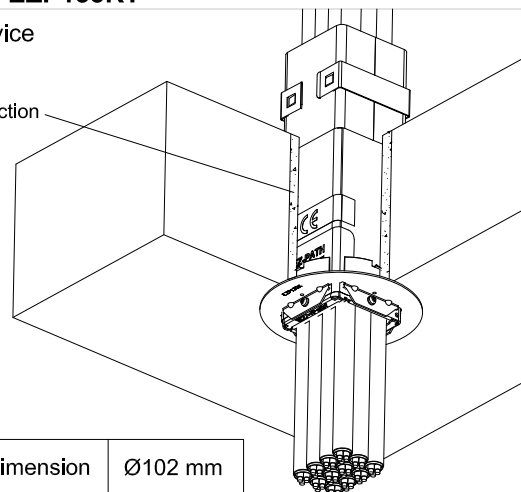

Opening dimension Ø102 mm

Please refer to ETA 13/0887 and corresponding Application Sheets and Installation Sheets for additional information

** EZP733WT plate kit not in stock. Please contact the STI representative for more information