


VIS VHM VHM SCREW

Reference(s) : 801 301/21/23/24/31/41/61
801 401/04/11/14/21/24/31/43/53/61/64/67/71/74/
350 436/37/38/39/40/41/42/43/44/45/46/47




EN ISO 4014



VHM PF



EN ISO 4017



VHM


1. GAMME / RANGE

Designation	Code	Type	Poids / Weight (Kg) (lb)		L (mm) (inch)		d1	Classe / Class	Norme / Standard	Finition / Coating	Classe de résistance contre la corrosion/ <i>Class for resistance against corrosion</i>
VHM6x12 ZnNi	350 436	EN ISO 4017	0.0055	0.012	12	0,787	M6	6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537
VHM6x20 EZ	801 301		0.0075	0.017	20				ISO 898-1	EZ	Class 1 / IEC 61537
VHM6x20 ZnNi	350 437									ZnNi	Class 8 / IEC 61537
VHM8x20 EZ	801 321		0.0137	0.030	20	0,787	M8	6.8	ISO 898-1	EZ	Class 1 / IEC 61537
VHM8x20 ZnL	801 323							8.8	ISO 898-1	ZnL	Class 6 / IEC 61537
VHM8x20 316L	801 324							A4	ISO 3506-1	IN316L / SS316L	Class 9D / IEC 61537
VHM8x20 ZnNi	350 438							6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537
VHM8x25 EZ	801 331		0.0149	0.033	25	0,984	M8	6.8	ISO 898-1	EZ	Class 1 / IEC 61537
VHM8x30 ZnL	801 443							8.8	ISO 898-1	ZnL	Class 6 / IEC 61537
VHM8x30 ZnNi	350 440		0.0157	0.035	30	1,181	M8	6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537
VHM8x40 EZ	801 341	0.0216	0.048	40	1,575	6.8		ISO 898-1	EZ	Class 1 / IEC 61537	
VHM8x40 ZnNi	350 441							ZnNi	Class 8 / IEC 61537		
VHM8x45 ZnL	801 467	0.0237	0.052	45	1.771	M8		8.8	ISO 898-1	ZnL	Class 6 / IEC 61537
VHM8x60 PF ZnL	801 453	0.0305	0.067	60	2,362		8.8	ISO 898-1	ZnL	Class 6 / IEC 61537	
VHM8x60 ZnNi	350 442						6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537	
VHM10x20 EZ	801 361	EN ISO 4017	0.024	0.053	20	0,787	M10	6.8	ISO 898-1	EZ	Class 1 / IEC 61537
VHM10x25 ZnNi	350 439		0.027	0.060	25			6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537
VHM10x70 EZ	801 431		0.055	0.121	70			2,756	6.8	ISO 898-1	EZ
VHM10x70 PF ZnNi	340 443	EN ISO 4014				6.8			ISO 898-1	ZnNi	Class 8 / IEC 61537
VHM12x25 EZ	801 401	EN ISO 4017	0.039	0.086	25	0,984	M12	6.8	ISO 898-1	EZ	Class 1 / IEC 61537
VHM12x25 316L	801 404							A4	ISO 3506-1	IN316L / SS316L	Class 9D / IEC 61537
VHM12x25 ZnNi	350 444							6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537
VHM12x30 EZ	801 411		6.8	ISO 898-1	EZ	Class 1 / IEC 61537					
VHM12x30 316L	801 414		0.044	0.097	30	1,181	A4	ISO 3506-1	IN316L / SS316L	Class 9D / IEC 61537	
VHM12x50 EZ	801 421						6.8	ISO 898-1	EZ	Class 1 / IEC 61537	
VHM12x50 316L	801 424		0.060	0.132	50	1,969	A4	ISO 3506-1	IN316L / SS316L	Class 9D / IEC 61537	
VHM12x50 ZnNi	350 445						6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537	
VHM12x70 EZ	801 461						6.8	ISO 898-1	EZ	Class 1 / IEC 61537	
VHM12x70 316L	801 464		0.078	0.172	70	2,756	A4	ISO 3506-1	IN316L / SS316L	Class 9D / IEC 61537	
VHM12x70 ZnNi	350 446						6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537	
VHM12x110 EZ	801 471						6.8	ISO 898-1	EZ	Class 1 / IEC 61537	
VHM12x110 316L	801 474		0.114	0.0131	110	4,331	A4	ISO 3506-1	IN316L / SS316L	Class 9D / IEC 61537	
VHM12x110 ZnNi	350 447						6.8	ISO 898-1	ZnNi	Class 8 / IEC 61537	


2. DIMENSIONS (mm/inch)



EN ISO 4014

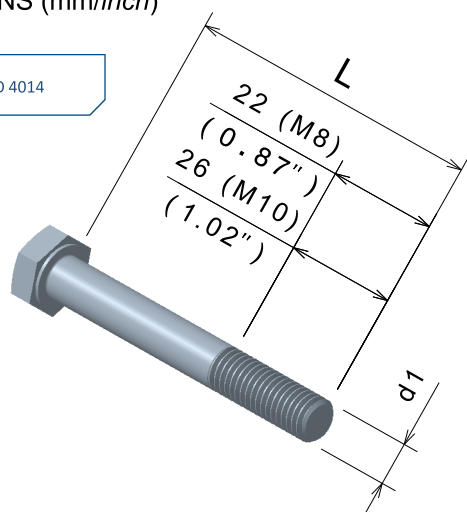

EN ISO 4017

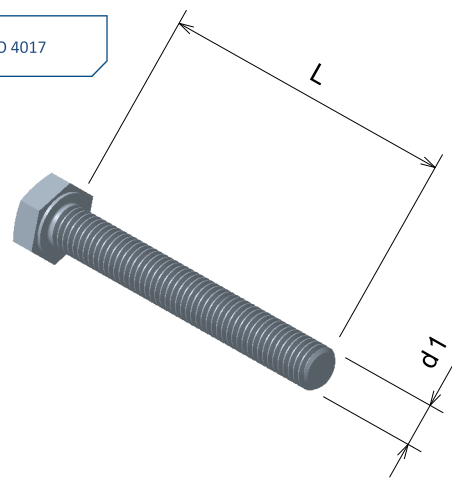

VIS VHM
VHM SCREW

Reference(s) : 801 301/21/23/24/31/41/61
801 401/04/11/14/21/24/31/43/53/61/64/67/71/74/
350 436/37/38/39/40/41/42/43/44/45/46/47



E41 M6->12



EE8NYL



HM 6->12



RM 6->12

3. INSTALLATION

